
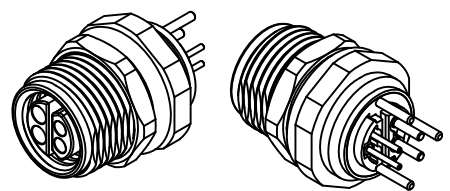

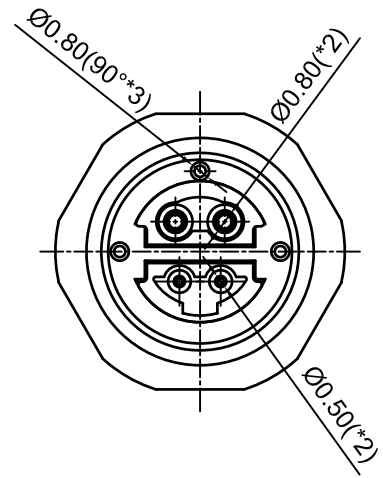
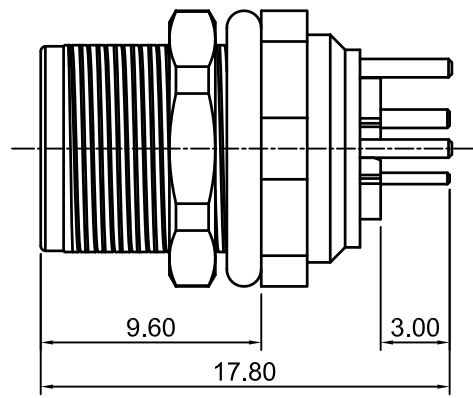
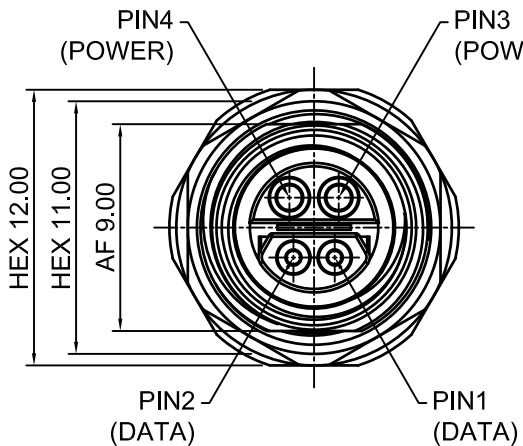
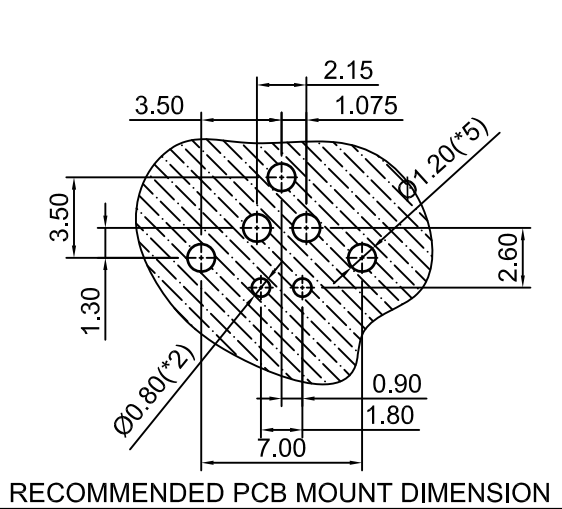


Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2022-07-06

- NOTE:
- ELECTRICAL CHARACTERISTICS:
 - VOLTAGE PROOF: 1000V DC
 - RATED VOLTAGE: 60V DC
 - RATED CURRENT:
 - 8A MAX. (POWER)
 - 4A MAX. (DATA)
 - MECHANICAL CHARACTERISTICS:
 - INTERFACE: IEC63171-6 (6J-M8C)
 - TEMPERATURE RANGE: -40°C~+85°C
 - WATERPROOF: IP67
 - ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

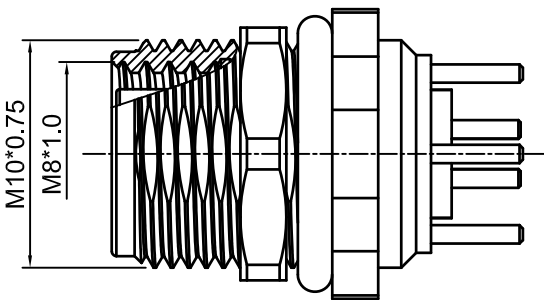

⑧	HEX NUT	BRASS	NICKEL	1EA
⑦	O-RING (SMALL)	SILICONE RUBBER	NATURAL	1EA
⑥	O-RING (BIG)	SILICONE RUBBER	NATURAL	1EA
⑤	CONTACT (DATA)	BERYLLIUM COPPER	GOLD	2EA
④	CONTACT (POWER)	BERYLLIUM COPPER	GOLD	2EA
③	INSULATOR	NYLON	NATURAL	1EA
②	DIRECTION GUIDE	ZINC ALLOY	NICKEL	1EA
①	BODY	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

RECOMMENDED PANEL HOLE

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.02
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

		SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com	
Shinto P/N:		SPE-6J-M8C	
Description:		SPE T1 M8 JACK FOR PCB DIP MOUNT	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 3:1	Sheet: 1 of 1