
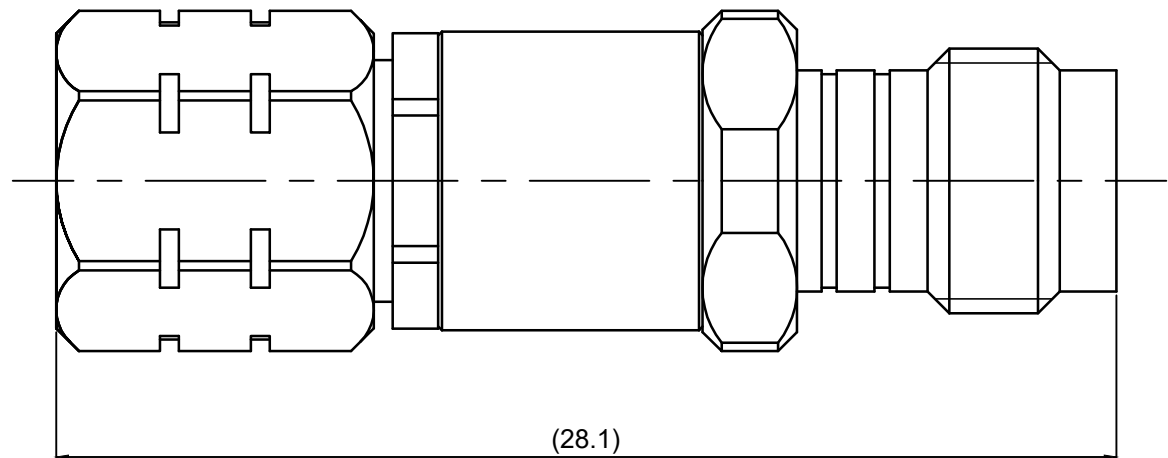


Customer code:	NONE	Part number:	185-185-PJS	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS: 1.1 IMPEDANCE:50Ω 1.2 FREQUENCY RANGE:DC~67GHz 1.3 VSWR:1.3 MAX 1.4 INSERTION LOSS:≤0.05×sqrt(F(F in GHz)) dB 1.5 DIELECTRIC WITHSTAND VOLTAGE:500V 1.6 INSULATION RESISTANCE:5000MΩ MIN 2. MECHANICAL CHARACTERISTICS: 2.1 DURABILITY: 500 CYCLES MIN. 3. TEMPERATURE RANGE: -55°C~+125°C 4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	Jo.Yuan	2023-12-08

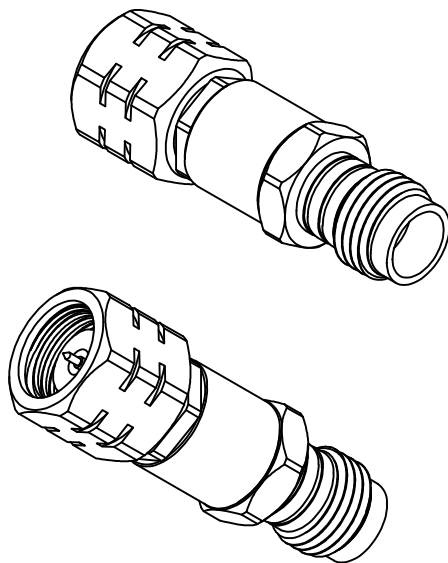

③	INSULATOR	PEI	NATURE	1 EA
②	CENTER CONTACT	BERYLLIUM COPPER	GOLD	1 EA
①	OUTER CONTACT	STAINLESS STEEL	PASSIVATED	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.05
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	J.DENG
Checked By:	M.YANG
Drawn By:	J.YUAN

SHINTO		SHINTO ELECTRONICS CO.,LTD	
		http://www.shinto-electronics.com	
Shinto P/N: 185-185-PJS		Description: 1.85MM PLUG TO 1.85MM JACK S/T	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1

