

Changing log NONE Customer code: Part number: 292-292-PJS Rev: Α Description Rev. ECN# Changed by Date NOTE: FIRST RELEASE. 2023-12-08 NONE Jo.Yuan

- 1. ELECTRICAL CHARACTERISTICS:
 - 1.1 IMPEDANCE:50Ω
 - 1.2 FREQUENCY RANGE:DC~40GHz
 - 1.3 VSWR:1.2 MAX
 - 1.4 INSERTION LOSS:≤0.05×sqrt(F(F in GHz)) dB
 - 1.5 DIELECTRIC WITHSTAND VOLTAGE:500V
 - 1.6 INSULATION RESISTANCE:5000MΩ MIN
- 2. MECHANICAL CHARACTERISTICS:
 - 2.1 DURABILITY: 500 CYCLES MIN.
- 3. TEMPERATURE RANGE: -55°C~+125°C
- 4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

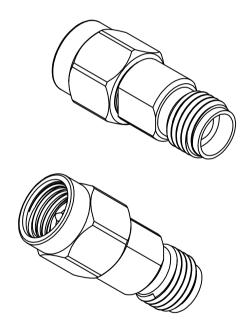

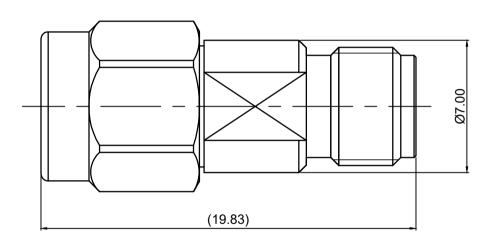

3	INSULATOR	PEI	NATURE	1 EA				
2	CENTER CONTACT	BERYLLIUM COPPER	GOLD	1 EA				
1	OUTER CONTACT	STAINLESS STEEL	PASSIVATED	1 EA				
ITEM	NAME	MATERIAL	TREATMENT	QTY				
Bill Of Material								

		SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
TOLERANCES UNLESS OTHERWISE SPECIFIED	Signature	Shinto P/N:	292-292-PJS	2-292-PJS	
ONE PLACE DECIMAL .X ±0.20	- Approved By:	Description:	scription: 2.92MM PLUG TO 2.92MM JACK S/T		
TWO PLACE DECIMAL .XX ±0.10 THREE PLACE DECIMAL .XXX ±0.05	Checked By:	Material:	See BOM	Treatment:	See BOM
HOLE DIA. VARIATION .XX N/A ANGULAR DIMENSION ±3°	Drawn By:	Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO SHINTO.ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF SHINTO IS PROHIBITED.

