




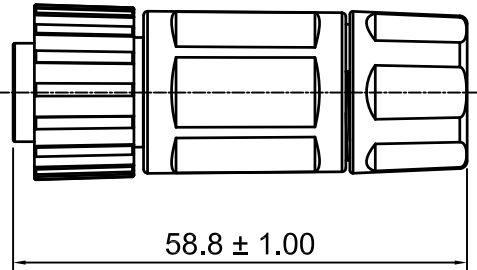
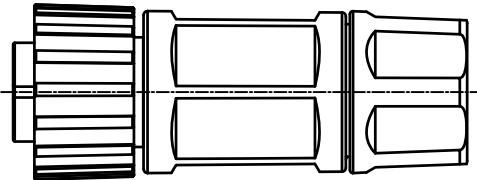


- NOTE:
- 1. POLES: 2
 - 2. RATED VOLTAGE: 250V
 - 3. RATED CURRENT: 10A
 - 4. CONTACT RESISTANCE 10mΩ
 - 5. INSULATION RESISTANCE: 500MΩ
 - 6. MATING CYCLE: 500 TIMES
 - 7. TEMPERATURE RANGE: -40°C ~ +85°C
 - 8. UL94 - V0
 - 9. ALL MATERIALS AND PROCESS ARE ROHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2022-08-18

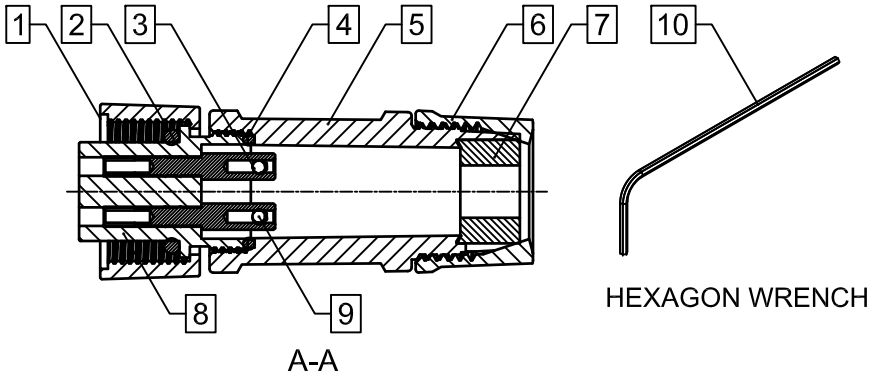

PACKAGE INSTRUCTION

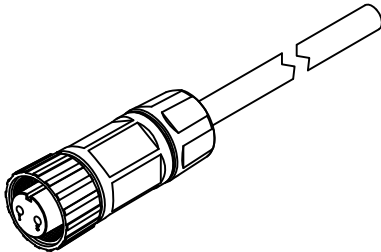

⑩	HEX. WRENCH	CARBON STEEL	BLACKENING	1EA
⑨	SCREW	CARBON STEEL	BLACKENING	2EA
⑧	BODY	PBT+PC	BLACK	1EA
⑦	SEALING RUBBER	SILICONE RUBBER	BLACK	1EA
⑥	SEALING NUT	PBT	BLACK	1EA
⑤	HOUSING	PBT	BLACK	1EA
④	O-RING INNER	SILICONE RUBBER	RED	1EA
③	CONTACT PIN	COPPER ALLOY	GOLD	2EA
②	O-RING OUTER	SILICONE RUBBER	BLACK	1EA
①	COUPLING NUT	PBT	BLACK	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X		±0.20
TWO PLACE DECIMAL .XX		±0.1
THREE PLACE DECIMAL .XXX		±0.05
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

		SHINTO ELECTRONICS CO.,LTD	
		http://www.shinto-electronics.com	
Shinto P/N:		M19NFS02-0036	
Description:		M19 JACK 2PIN FOR CABLE SCREW MOUNT	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 1:1	Sheet: 1 of 1