
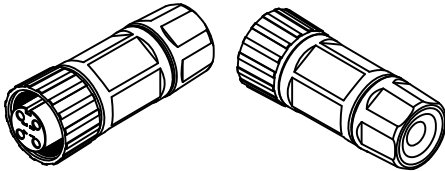


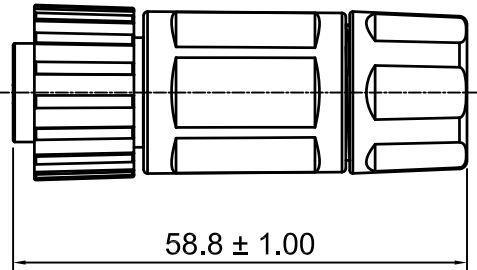
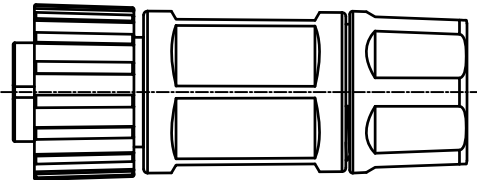
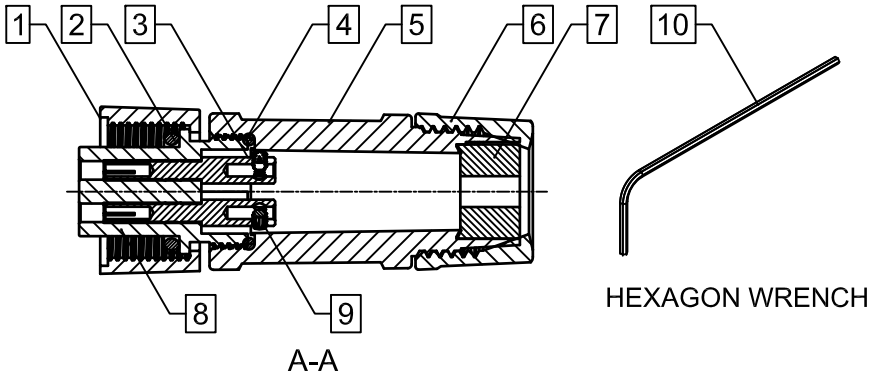


NOTE:

1. POLES: 4
2. RATED VOLTAGE: 250V
3. RATED CURRENT: 10A
4. CONTACT RESISTANCE 10mΩ
5. INSULATION RESISTANCE: 500MΩ
6. MATING CYCLE: 500 TIMES
7. TEMPERATURE RANGE: -40°C ~ +85°C
8. UL94 - V0
9. ALL MATERIALS AND PROCESS ARE ROHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2022-08-18

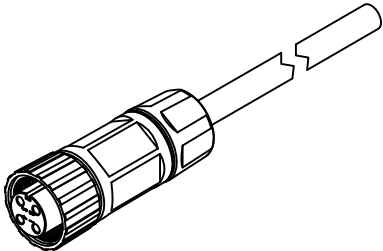

⑩	HEX. WRENCH	CARBON STEEL	BLACKENING	1EA
⑨	SCREW	CARBON STEEL	BLACKENING	4EA
⑧	BODY	PBT+PC	BLACK	1EA
⑦	SEALING RUBBER	SILICONE RUBBER	BLACK	1EA
⑥	SEALING NUT	PBT	BLACK	1EA
⑤	HOUSING	PBT	BLACK	1EA
④	O-RING INNER	SILICONE RUBBER	RED	1EA
③	CONTACT PIN	COPPER ALLOY	GOLD	4EA
②	O-RING OUTER	SILICONE RUBBER	BLACK	1EA
①	COUPLING NUT	PBT	BLACK	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.1
THREE PLACE DECIMAL	.XXX	±0.05
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

 SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N:		M19NFS04-0038	
Description:		M19 JACK 4PIN FOR CABLE SCREW MOUNT	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 1:1	Sheet: 1 of 1