
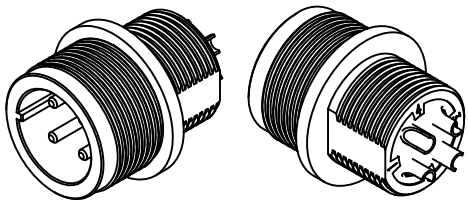
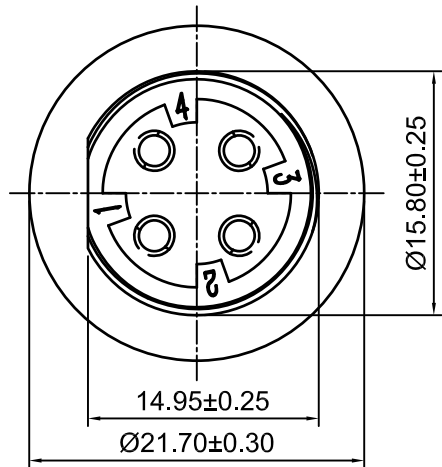
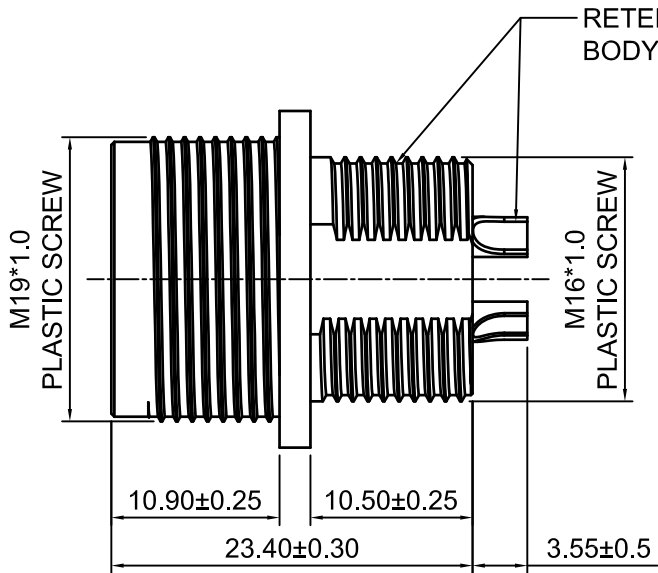


Customer code:	NONE	Part number:	M19NMS04-0037	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS: 1.1 RATED VOLTAGE: 250V 1.2 RATED CURRENT: 10A 1.3 CONTACT RESISTANCE: 10mΩ 1.4 INSULATION RESISTANCE: 500MΩ 2. MECHANICAL CHARACTERISTIC: 2.1 TEMPERATURE RANGE: -40°C ~ +80°C 2.2 UL94-V0 3. ENVIRONMENTAL CHARACTERISTIC: ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	M.YANG	2025-03-24

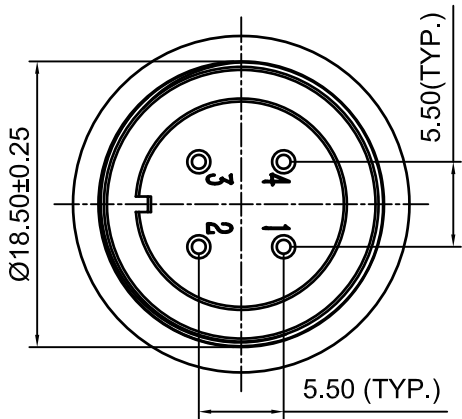

③	ADHESIVE	EPOXY ADHESIVE A:B BLACK	1 EA
②	CONTACT PIN	COPPER ALLOY GOLD PLATING	4 EA
①	BODY	HOUSING PBT+PC BLACK UL94-V0	1 EA
ITEM	NAME	DESCRIPTION	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X		±0.20
TWO PLACE DECIMAL .XX		±0.10
THREE PLACE DECIMAL .XXX		±0.02
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

		SHINTO ELECTRONICS CO.,LTD			
		http://www.shinto-electronics.com			
Shinto P/N:		M19NMS04-0037			
Description:		M19 Circular Connector Plug 4 pin			
Material:		See BOM	Treatment:		See BOM
Unit: mm		Size: A4	Scale: 2:1		Sheet: 1 of 1