

- NOTE:
1. ELECTRICAL CHARACTERISTICS:

1.1 IMPEDANCE: 75Ω

1.2 FREQUENCY RANGE:DC~12GHz

1.3 VSWR: 1.1 MAX. @ 3GHz

1.2 MAX. @ 6GHz

1.3 MAX. @ 12GHz

2. MECHANICAL CHARACTERISTIC:


2.1 TEMPERATURE RANGE: -65 ~ +165°C

2.2 MATING CYCLES: 500 TIMES

3. ALL PROCESS TO BE COMPLIANT TO IPC-620.

4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2020-06-25

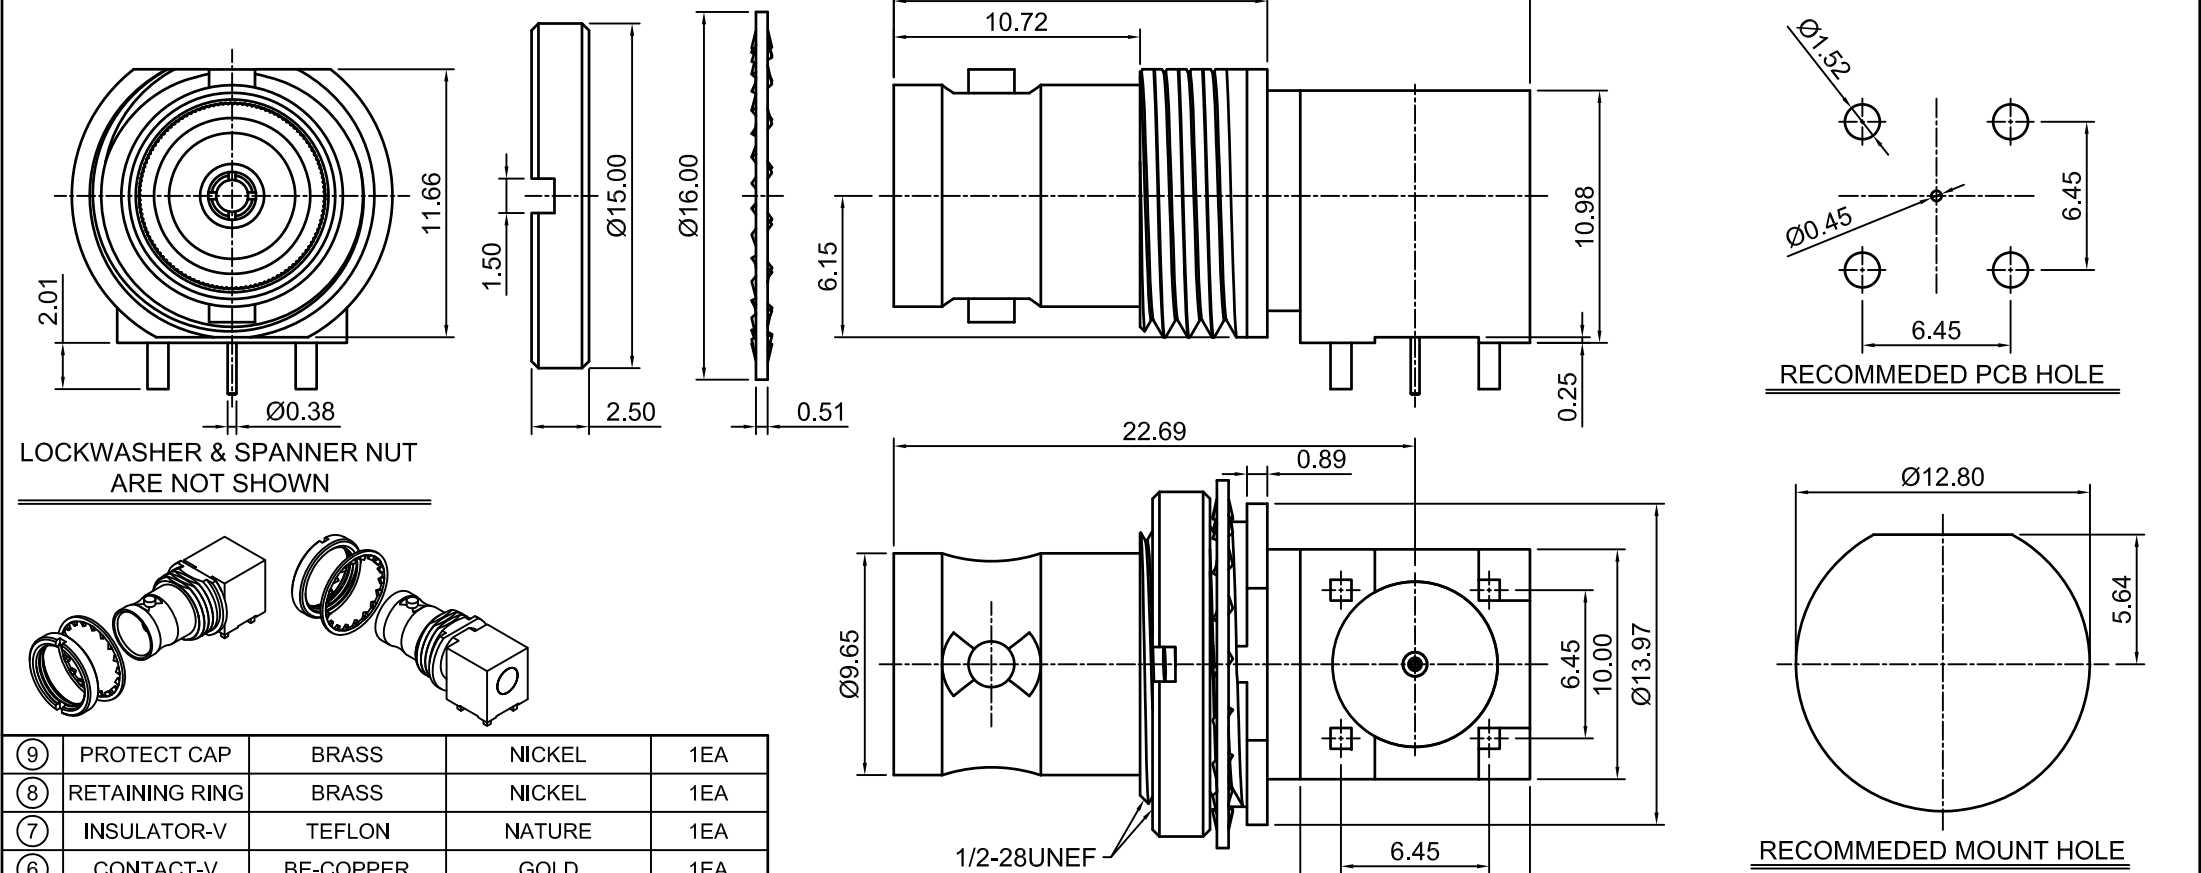

⑨	PROTECT CAP	BRASS	NICKEL	1EA
⑧	RETAINING RING	BRASS	NICKEL	1EA
⑦	INSULATOR-V	TEFLON	NATURE	1EA
⑥	CONTACT-V	BE-COPPER	GOLD	1EA
⑤	INSULATOR-H	TEFLON	NATURE	1EA
④	CONTACT-H	BE-COPPER	GOLD	1EA
③	LOCK-WASHER	PHOSPHOR BRONZE	NICKEL	1EA
②	SPANNER NUT	BRASS	NICKEL	1EA
①	BODY	BRASS	MATTE TIN	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		Signature		Shinto P/N: BFR110PCB-A717-12G			
ONE PLACE DECIMAL .X	±0.20	Approved By:		Description: BNC Jack R/A B_H For PCB Mount Optimized			
TWO PLACE DECIMAL .XX	±0.1	Checked By:		Material:	See BOM	Treatment:	See BOM
THREE PLACE DECIMAL .XXX	±0.05	Drawn By:	M.YANG	Unit:	mm	Size:	A4
HOLE DIA. VARIATION .XX	N/A			Scale:	3:1	Sheet:	1 of 1
ANGULAR DIMENSION	±3°						