

- NOTE:
1. ELECTRICAL CHARACTERISTICS:

1.1 IMPEDANCE:50Ω

1.2 FREQUENCY RANGE:DC~6GHz

1.3 VSWR: 1.3 MAX.


2. MECHANICAL CHARACTERISTICS:

2.1 DURABILITY: 500 CYCLES

2.2 TEMPERATURE RANGE: -65°C~+165°C


3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2017-06-05

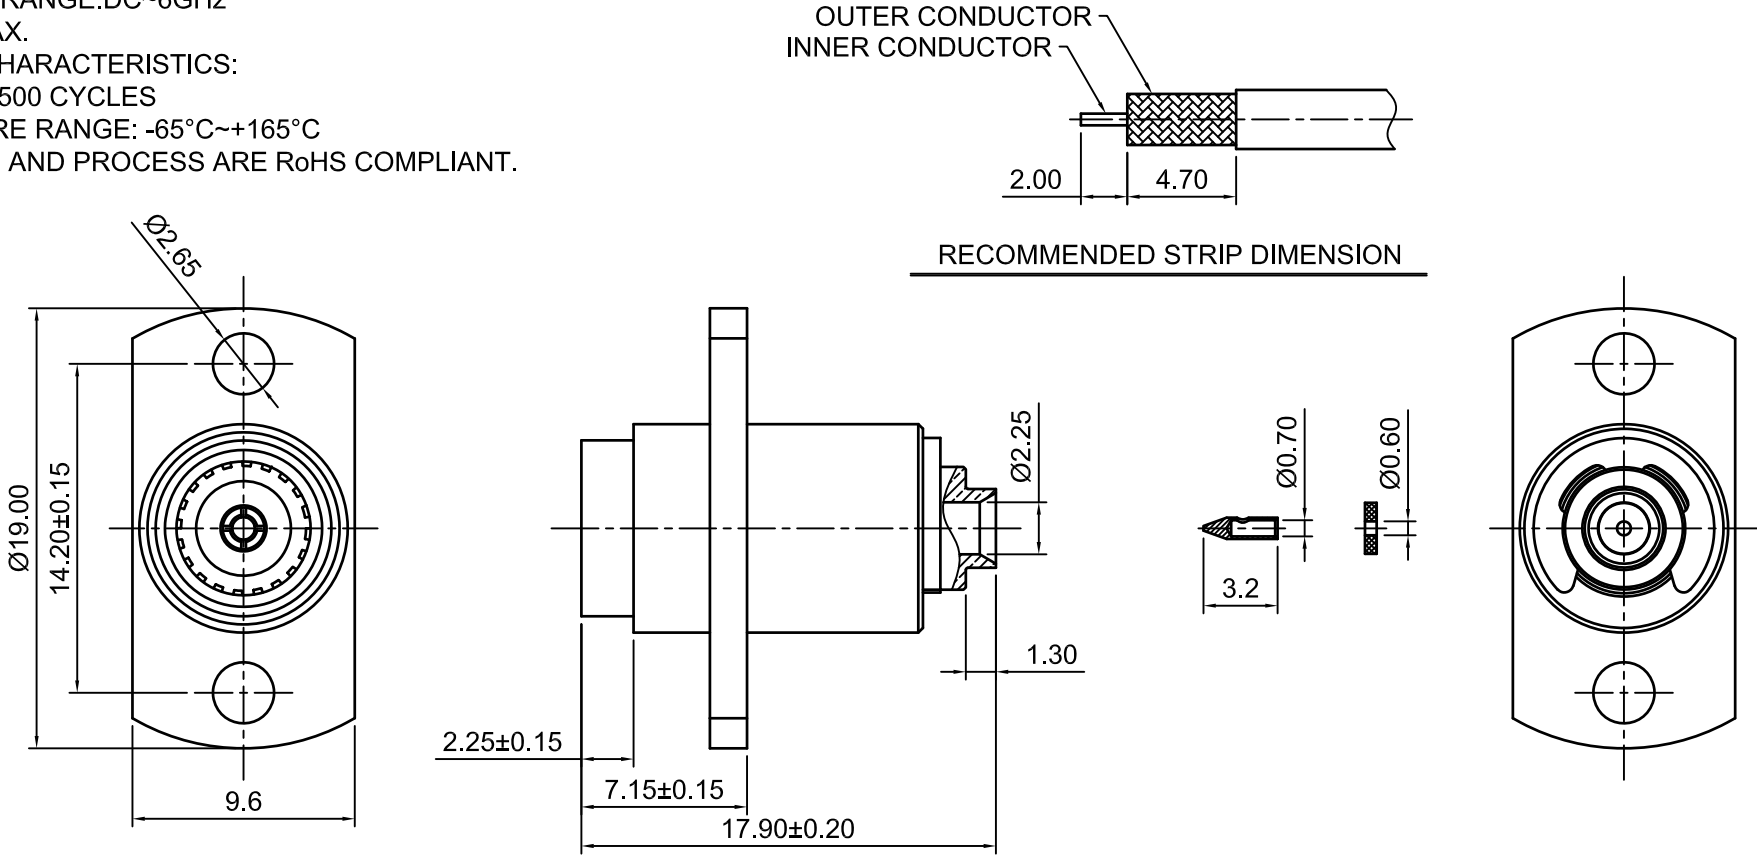

⑨	INSULATOR	TEFLON	NATURAL	1EA
⑧	SOLDERING PIN	BRASS	GOLD	1EA
⑦	LOCK WASHER	STAINLESS STEEL	NATURAL	1EA
⑥	SPRING	STAINLESS STEEL	NATURAL	1EA
⑤	INNER CONTACT	BERYLLIUM COPPER	GOLD	1EA
④	INSULATOR	TEFLON	NATURAL	1EA
③	OUTER CONTACT	BERYLLIUM COPPER	GOLD	1EA
②	BODY	BRASS	GOLD	1EA
①	COUPLING SHELL	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material



TOLERANCES UNLESS OTHERWISE SPECIFIED		Signature		Shinto P/N: BMFS31G405-A189			
		Approved By:		Description: BMA JACK 2 HOLES FLANGE FOR .086 CABLE			
ONE PLACE DECIMAL .X	±0.20	Checked By:		Material: See BOM		Treatment: See BOM	
TWO PLACE DECIMAL .XX	±0.10			Unit: mm		Size: A4	
THREE PLACE DECIMAL .XXX	±0.02	Drawn By: M.YANG		Scale: 3:1		Sheet: 1 of 1	
HOLE DIA. VARIATION .XX	N/A						
ANGULAR DIMENSION	±3°						