


Customer code:	NONE	Part number:	BMS11G058-A434	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS: 1.1 FREQUENCY RANGE:DC~6GHz 1.2 VSWR:1.5 MAX. 1.3 IMPEDANCE:50Ω 1.4 INSULATION RESISTANCE: 5000MΩ MIN. 1.5 CONTACT RESISTANCE 1.5.1 CENTER CONTACT: 3 mΩ 1.5.2 OUTER CONTACT: 2.5 mΩ 2. MECHANICAL CHARACTERISTICS: 2.1 TEMPERATURE RANGE: -45°C~+125°C 2.2 MATING CYCLE: 500 TIMES 2.3 WATERPROOF: IP67 3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	M.YANG	2022-01-19

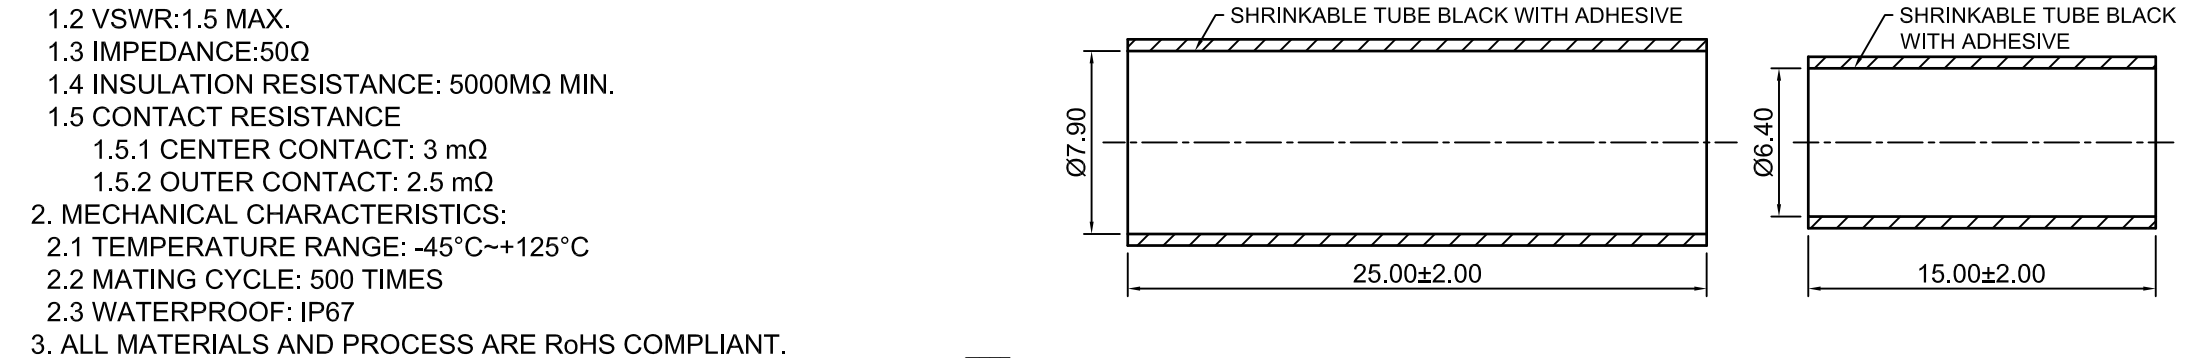

⑩	SHRINK TUBE	EVA	NATURE	2EA
⑨	O-RING	SILICONE RUBBER	NATURE	2EA
⑧	GASKET	SILICONE RUBBER	NATURE	1EA
⑦	SPRING	STEEL	NICKEL	1EA
⑥	FERRULE	BRASS	NICKEL	1EA
⑤	INSULATOR	TEFLON	NATURAL	1EA
④	CONTACT PIN	BRASS	GOLD	1EA
③	BODY	BRASS	NICKEL	1EA
②	INSULATOR	TEFLON	NATURAL	1EA
①	SHELL	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material			HOLE DIA. VARIATION .XX N/A		Drawn By:	Unit: mm	Size: A4	Scale: 3:1	Sheet: 1 of 1	
			ANGULAR DIMENSION ±3°							
THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO SHINTO.ANY USE OR DISCLOSURE OF THIS INFORMATION,EXCEPT FOR THE EXCLUSIVE BENEFIT OF SHINTO IS PROHIBITED.										