



Customer code:	NONE	Part number:	BMS11G179-A282	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS: 1.1 IMPEDANCE:75Ω 1.2 FREQUENCY RANGE:DC~6GHz 1.3 VSWR:1.3 MAX. 2. MECHANICAL CHARACTERISTICS: 2.1 MATING CYCLE: 500 TIMES 3. ENVIRONMENTAL CHARACTERISTICS: 3.1 TEMPERATURE RANGE: -20℃~+150℃ 3.2 ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	NONE	NEW RELEASE.	Jo.Yuan	2024-03-21

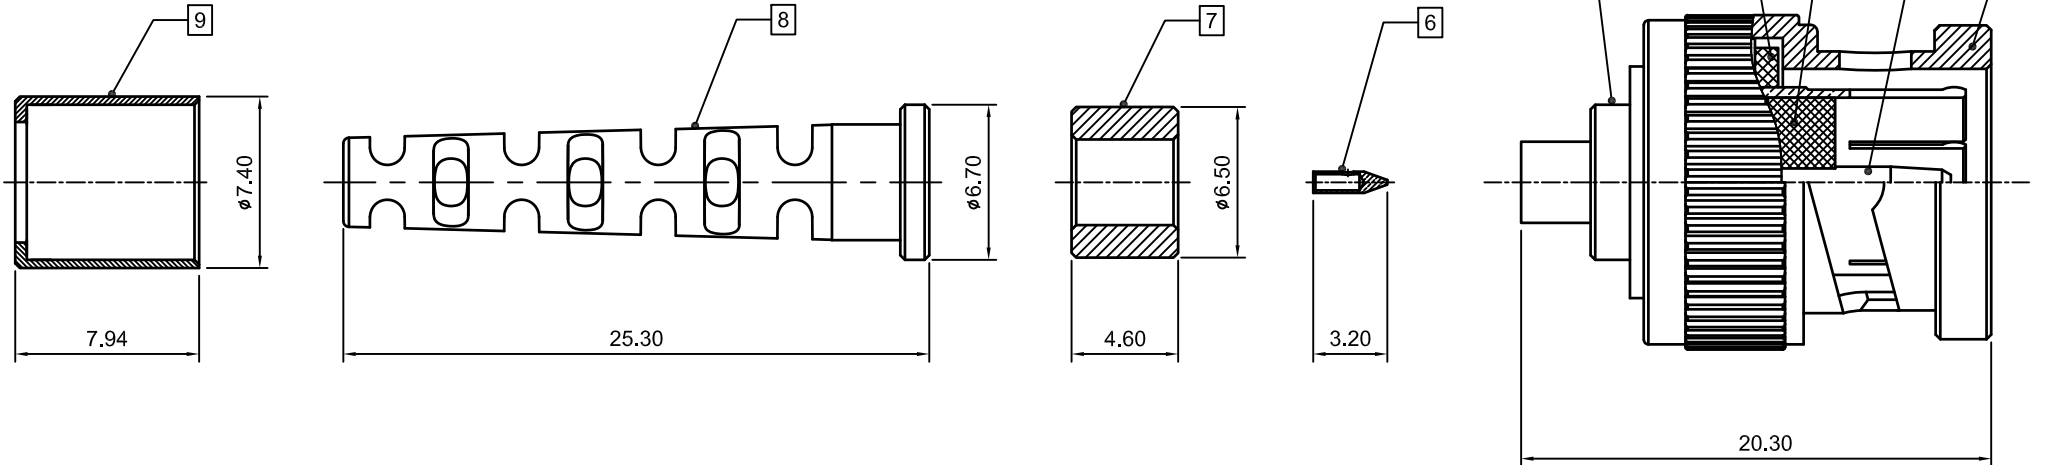

⑨	FERRULE	BRASS	NICKEL	1EA
⑧	SR	TPE	NATURAL	1EA
⑦	CLASP	BRASS	CLEAN	1EA
⑥	CONTACT PIN	BRASS	GOLD	1EA
⑤	BODY	BRASS	NICKEL	1EA
④	GASKET	SILICONE RUBBER	NATURAL	1EA
③	INSULATOR	PTFE	NATURAL	1EA
②	CONTACT PIN	BRASS	GOLD	1EA
①	SHELL	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

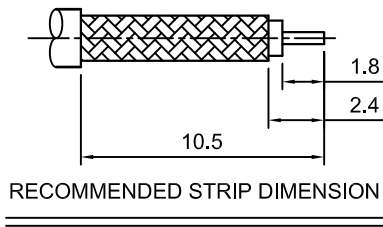

Bill Of Material					Signature		Shinto P/N: BMS11G179-A282			
					Approved By:		Description: BNC PLUG S/T FOR RG179 CABLE			
					Checked By:		Material: See BOM		Treatment: See BOM	
					Drawn By:		Unit: mm		Size: A4	
							Scale: 3:1		Sheet: 1 of 1	

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X	±0.20	
TWO PLACE DECIMAL .XX	±0.10	
THREE PLACE DECIMAL .XXX	±0.05	
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION	±3°	

