
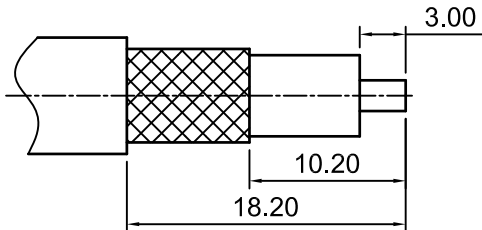
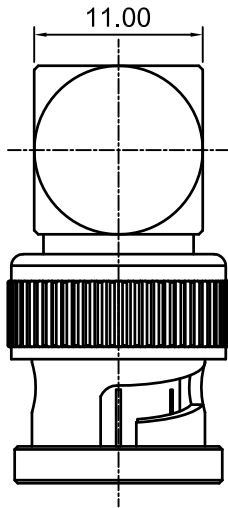
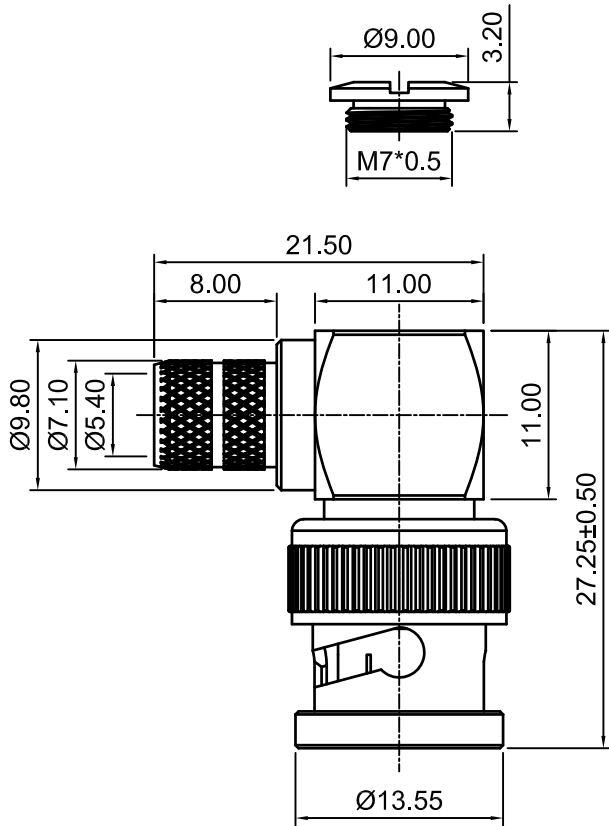


NOTE:

1. ELECTRICAL CHARACTERISTICS:
- 1.1 NOMINAL IMPEDANCE: 50Ω
- 1.2 FREQUENCY RANGE: 300KHz ~6000MHz
- 1.3 VSWR: 1.5
2. MECHANICAL CHARACTERISTIC:
- 2.1 DURABILITY: 500 CYCLES
- 2.2 TEMPERATURE RANGE: -65°C~+165°C
3. ENVIRONMENTAL CHARACTERISTIC:
- ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2021-12-27



RECOMMENDED STRIPPING DIMENSION



⑩	COVER	BRASS	NICKEL	1 EA
⑨	FERRULE	BRASS	NICKEL	1 EA
⑧	GASKET	SILICONE RUBBER	NATURAL	1 EA
⑦	FLAT WASHER	STEEL	NICKEL	1 EA
⑥	CONTAC PIN	BRASS	GOLD	1 EA
⑤	SPRING	PIANO WIRE	NICKEL	1 EA
④	C-RING	BRASS	NICKEL	1 EA
③	INSULATOR	TEFLON	NATURAL	1 EA
②	BODY	BRASS	NICKEL	1 EA
①	BAYONET SLEEVE	BRASS	NICKEL	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X		±0.20
TWO PLACE DECIMAL .XX		±0.10
THREE PLACE DECIMAL .XXX		±0.02
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION ±3°		

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO		SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N:		BNC-LP-5HFA			
Description:		BNC PLUG FOR 5D-HFA CABLE 90°			
Material:		See BOM	Treatment:		See BOM
Unit:	mm	Size:	A4	Scale:	2:1
		Sheet:		1 of 1	