
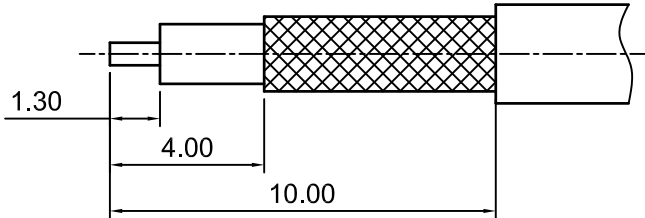
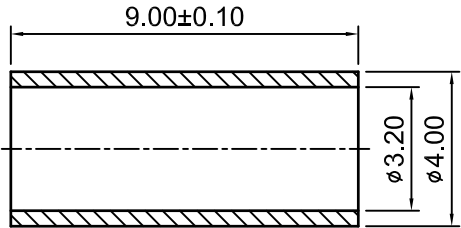
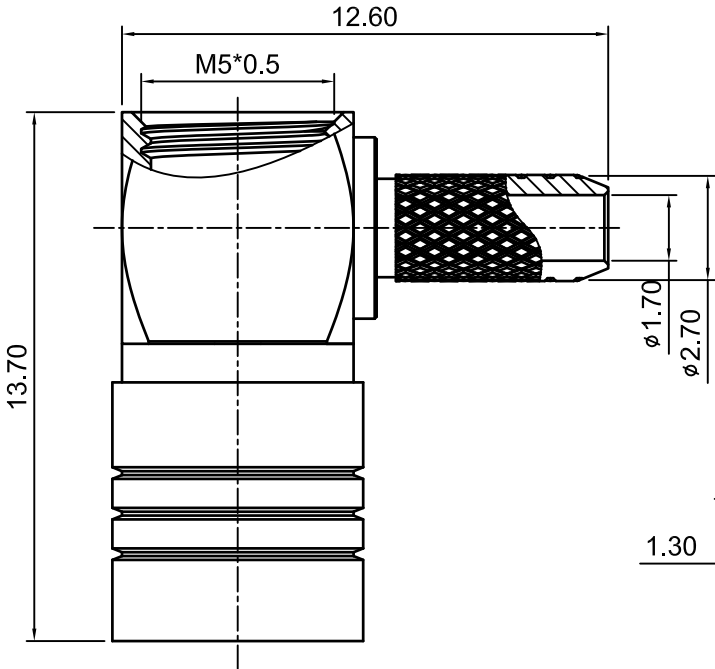
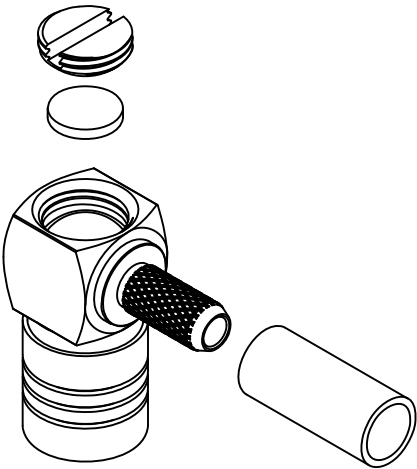


Customer code:	NONE	Part number:	MBMR10G179-A446	Rev:	A	Changing log				
NOTE: 1.ELECTRICAL CHARACTERISTICS: 1.1 FREQUENCY RANGE:DC~6GHz 1.2 IMPEDANCE:75Ω 1.3 RETURN LOSS: 26 dB @ 1GHz 21 dB @ 3GHz 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 800 VRMS. MIN. 2.MECHANICAL CHARACTERISTICS: 2.1 TEMPERATURE RANGE: -65°C~+165°C 2.2 DURABILITY: 500 CYCLES MIN. 3.ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	M.YANG	2022-03-17



RECOMMENDED STRIP DIMENSION

⑨	FERRULE	BRASS	NICKEL	1EA
⑧	PROTECT CAP	BRASS	NICKEL	1EA
⑦	INSULATOR	TEFLON	NATURE	1EA
⑥	BODY	BRASS	NICKEL	1EA
⑤	DIELECTRIC	TEFLON	NATURE	1EA
④	CENTER CONTACT	BERYLLIUM COPPER	GOLD	1EA
③	OUTER CONTACT	BRASS	NICKEL	1EA
②	C-RING	BERYLLIUM COPPER	NICKEL	1EA
①	SHELL	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED			
ONE PLACE DECIMAL	.X	±0.20	
TWO PLACE DECIMAL	.XX	±0.1	
THREE PLACE DECIMAL	.XXX	±0.05	
HOLE DIA. VARIATION	.XX	N/A	
ANGULAR DIMENSION		±3°	

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: MBMR10G179-A446			
Description: SMB jack right angle for RG179 nickel pl.			
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1