
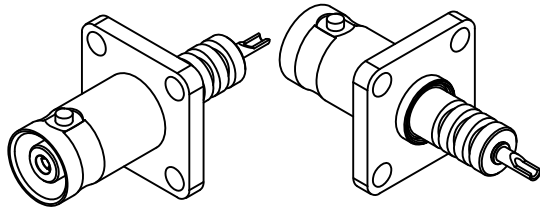
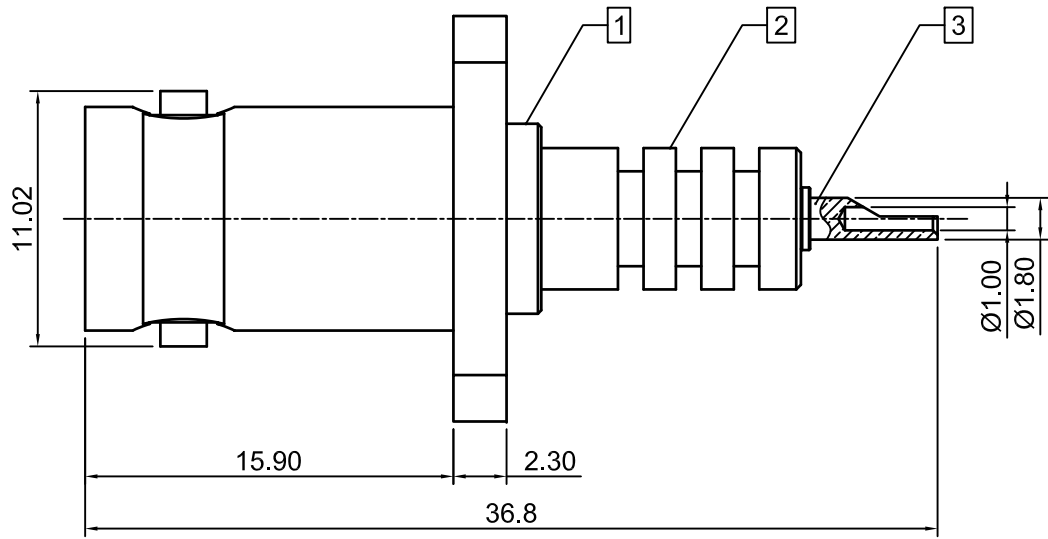


Customer code:	NONE	Part number:	MHV-PR-1	Rev:	A	Changing log				
NOTE: 1 ELECTRICAL CHARACTERISTICS: 1.1 IMPEDANCE: N/A 1.2 FREQUENCY RANGE: N/A 1.3 VSWR: N/A. 1.4 OPERATING VOLTAGE: AC 5000V 1.5 INSULATING RESISTANCE: DC 500V, 1000MΩ MIN. 2 MECHANICAL CHARACTERISTICS: 2.1 TEMPERATURE RANGE: -65°C~+165°C 2.2 DURABILITY: 500 CYCLES. 3 ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	M.YANG	2025-02-21

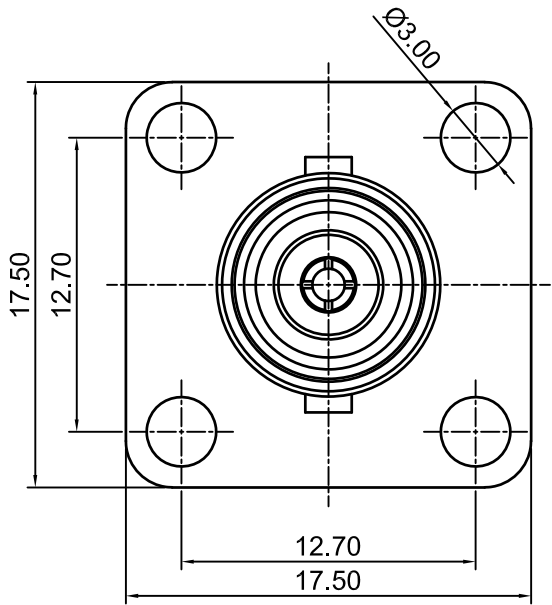

③	CONTACT PIN	COPPER ALLOY	GOLD	1 EA
②	INSULATOR	TEFLON	NATURE	1 EA
①	BODY	BRASS	NICKEL	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X	±0.20	
TWO PLACE DECIMAL .XX	±0.10	
THREE PLACE DECIMAL .XXX	±0.02	
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION	±3°	

Signature	
Approved By:	
Checked By:	
Drawn By:	

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: MHV-PR-1		Description: MHV RECEPTACLE FOR PANEL MOUNT	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 3:1	Sheet: 1 of 1