

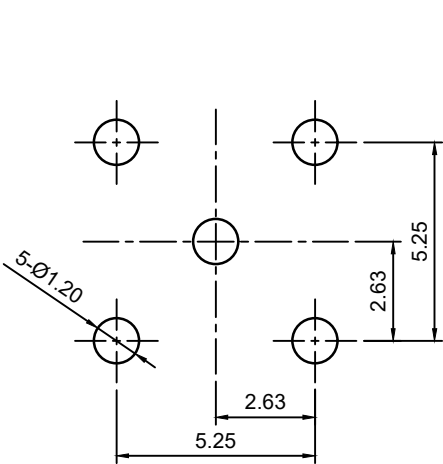


|                                                                                                   |      |              |                 |      |   |              |      |                |            |            |
|---------------------------------------------------------------------------------------------------|------|--------------|-----------------|------|---|--------------|------|----------------|------------|------------|
| Customer code:                                                                                    | NONE | Part number: | MMFS100000-A241 | Rev: | A | Changing log |      |                |            |            |
| <div>NOTE:</div> <div>1. ELECTRICAL CHARACTERISTICS:</div> <div>1.1 FREQUENCY RANGE:DC~6GHz</div> |      |              |                 |      |   | Rev.         | ECN# | Description    | Changed by | Date       |
|                                                                                                   |      |              |                 |      |   | A            | NONE | FIRST RELEASE. | Jo. Yuan   | 2024-08-20 |

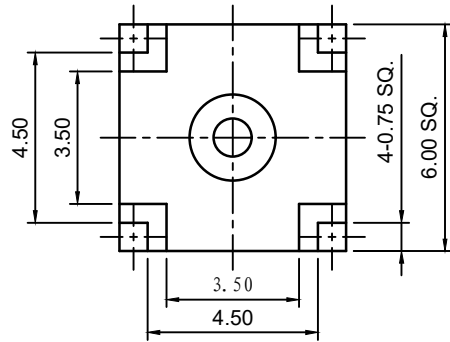

推荐PCB安装孔位

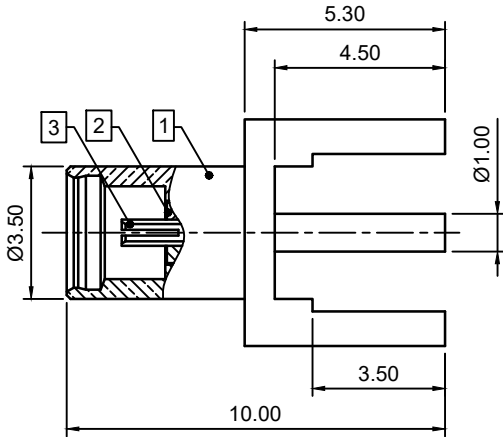

|                  |           |          |           |     |
|------------------|-----------|----------|-----------|-----|
| ⑤                | FERRULE   | BRASS    | NICKEL    | 1EA |
| ④                | INSULATOR | PTFE     | NATURE    | 1EA |
| ③                | CONTACT   | BRASS    | GOLD      | 1EA |
| ②                | INSULATOR | PTFE     | NATURE    | 1EA |
| ①                | BODY      | BRASS    | GOLD      | 1EA |
| ITEM             | NAME      | MATERIAL | TREATMENT | QTY |
| Bill Of Material |           |          |           |     |

| TOLERANCES UNLESS OTHERWISE SPECIFIED |            |
|---------------------------------------|------------|
| ONE PLACE DECIMAL                     | .X ±0.2    |
| TWO PLACE DECIMAL                     | .XX ±0.10  |
| THREE PLACE DECIMAL                   | .XXX ±0.05 |
| HOLE DIA. VARIATION                   | N/A        |
| ANGULAR DIMENSION                     | ±0.5°      |

| Signature    |  |
|--------------|--|
| Approved By: |  |
| Checked By:  |  |
| Drawn By:    |  |

|                                                                                                                               |          |            |               |
|-------------------------------------------------------------------------------------------------------------------------------|----------|------------|---------------|
| <b>SHINTO</b> SHINTO ELECTRONICS CO.,LTD<br><a href="http://www.shinto-electronics.com">http://www.shinto-electronics.com</a> |          |            |               |
| Shinto P/N: MMFS100000-A241                                                                                                   |          |            |               |
| Description: MCX JACK S/T FOR PCB                                                                                             |          |            |               |
| Material:                                                                                                                     | See BOM  | Treatment: | See BOM       |
| Unit: mm                                                                                                                      | Size: A4 | Scale: 5:1 | Sheet: 1 of 1 |