


Customer code:	NONE	Part number:	MMFS100000-A75	Rev:	A	Changing log			
----------------	------	--------------	----------------	------	---	--------------	--	--	--

NOTE:

- ELECTRICAL CHARACTERISTICS:
 - FREQUENCY RANGE:DC~6GHz
 - IMPEDANCE:50Ω
 - VSWR:1.3 MAX. @ 6GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS. MIN.
- MECHANICAL CHARACTERISTICS:
 - TEMPERATURE RANGE: -65°C~+165°C
 - DURABILITY: 500 CYCLES MIN.
- ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2014-04-28

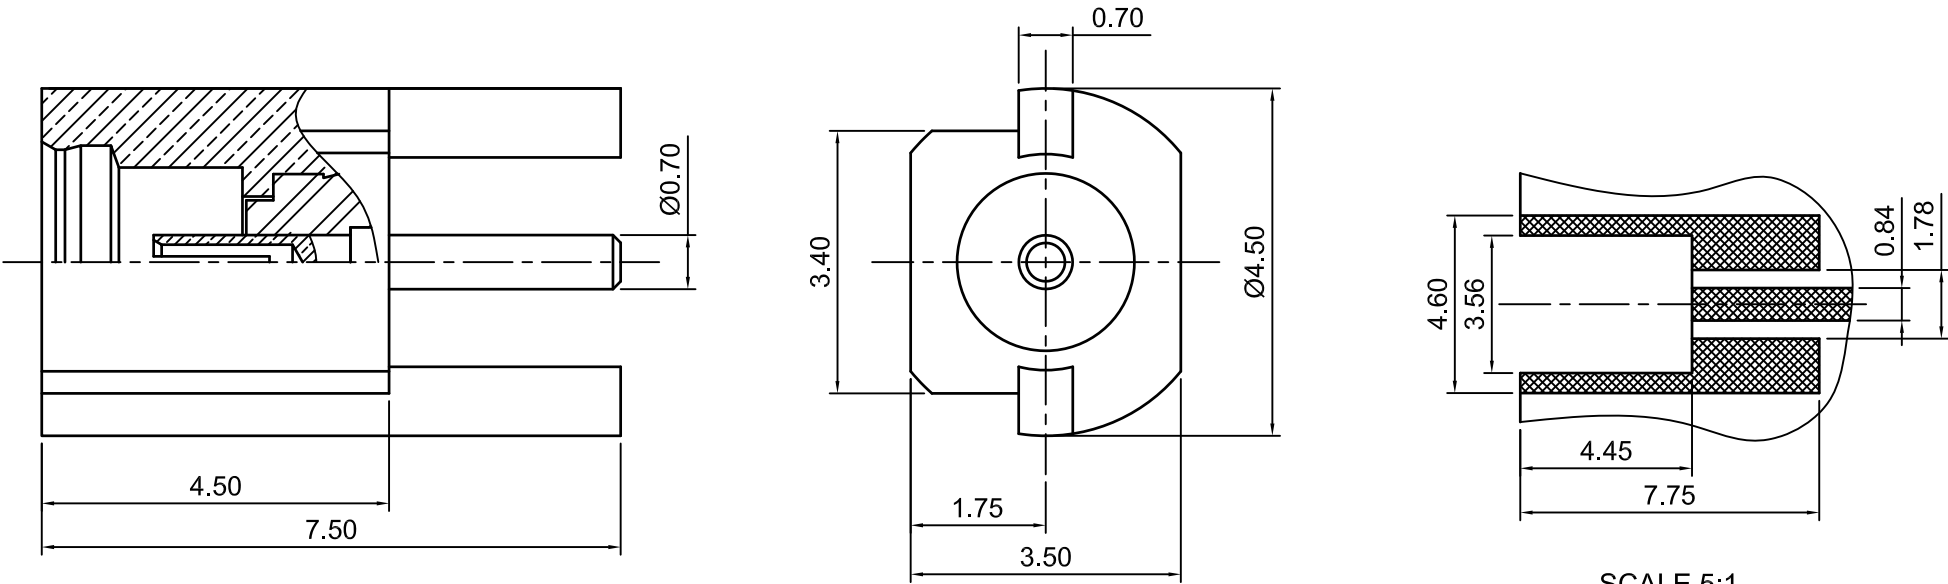

SCALE 5:1
RECOMMENDED PCB MOUNT DIMENSION

③	CONTACT PIN	BE-COPPER	GOLD	1 EA
②	INSULATOR	TEFLON	NATURE	1 EA
①	BODY	BRASS	GOLD	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.10
THREE PLACE DECIMAL .XXX	±0.02
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO		SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N:		MMFS100000-A75			
Description:		MMCX RECEPTACLE FOR PCB EDGE			
Material:		See BOM	Treatment:		See BOM
Unit:	mm	Size:	A4	Scale:	10:1
				Sheet:	1 of 1

