

NOTE:

1.ELECTRICAL CHARACTERISTICS:

1.1 FREQUENCY RANGE:DC~6GHz

1.2 IMPEDANCE:50Ω

1.3 VSWR:1.3 MAX. @ 6GHz

1.4 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS. MIN.





2.MECHANICAL CHARACTERISTICS:

2.1 TEMPERATURE RANGE: -65°C~+165°C


2.2 DURABILITY: 500 CYCLES MIN.

3.ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.


Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2016-09-13

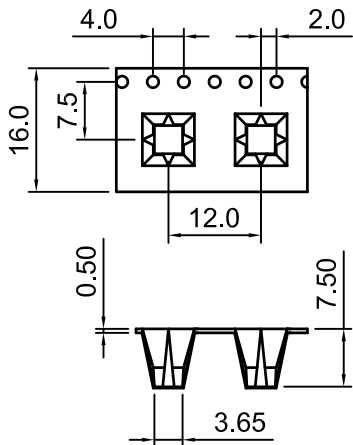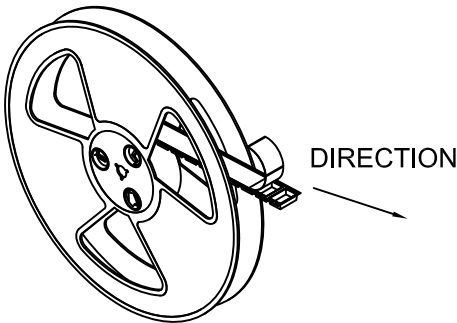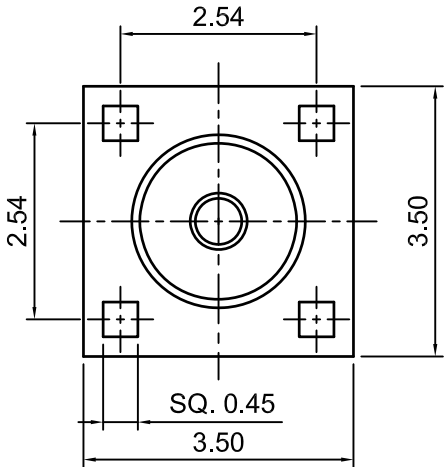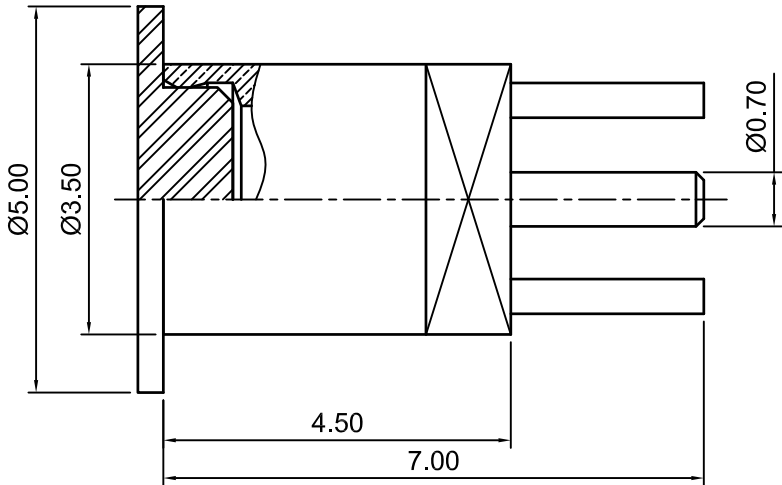

PACKAGE VIEW

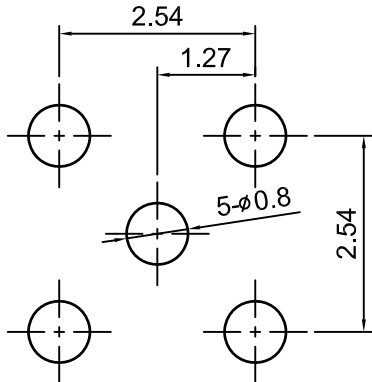

RECOMMENDED PCB HOLES



④	SMT CAP	TEFLON	NATURE	1 EA
③	CONTACT PIN	BE-COPPER	GOLD	1 EA
②	INSULATOR	TEFLON	NATURE	1 EA
①	BODY	BRASS	GOLD	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.02
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com	
Shinto P/N: MMFS300000-A28	
Description: MMCX RECEPTACLE FOR PCB 50 OHM	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 10:1	Sheet: 1 of 1

