

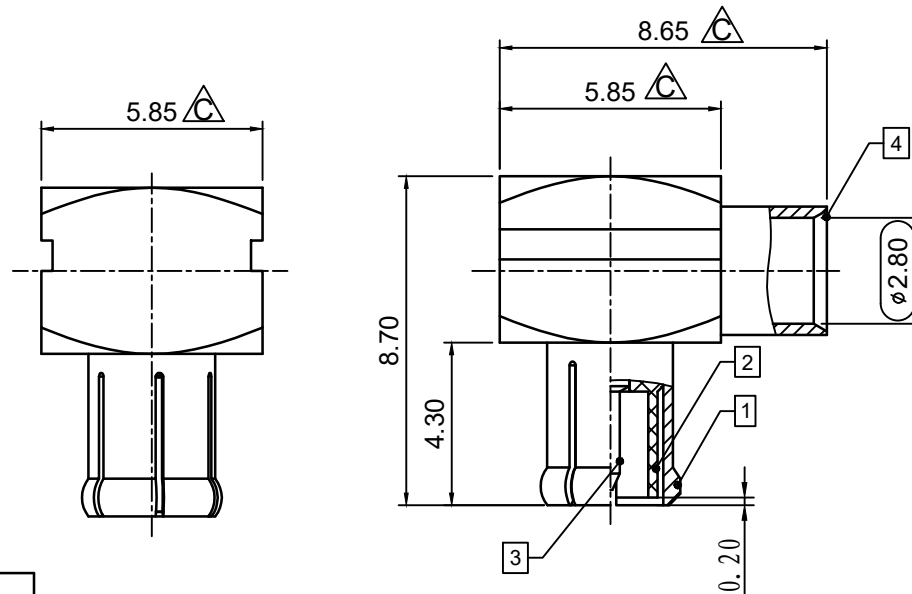


Customer code:	CS0050	Part number:	MMR10G405-A138	Rev:	C	Changing log				
Note: 1. ELECTRICAL CHARACTERISTICS: 1.1 IMPEDANCE: 50Ω 1.2 FREQUENCY RANGE: 0~6 GHz						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	MARK YANG	2015-12-17
						B	NONE	DIMENSION FROM 2.3 TO 2.8 MM.	MARK YANG	2015-12-22
						C	NONE	Change the dimension from 5.20*5.00 mm to 5.85*5.85 mm	MARK YANG	2016-03-25



⑤	PROTECT CAP	BRASS	GOLD	1 EA
④	BODY BACK	BRASS	GOLD	1 EA
③	CONTACT PIN	BRASS	GOLD	1 EA
②	INSULATOR	PTFE	NATURE	1 EA
①	BODY FRONT	PHOSPHOR COPPER	GOLD	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED			
ONE PLACE DECIMAL	.X	±0.20	
TWO PLACE DECIMAL	.XX	±0.10	
THREE PLACE DECIMAL	.XXX	±0.02	
HOLE DIA. VARIATION	.XX	N/A	
ANGULAR DIMENSION		±3°	

Signature		Shinto P/N: MMR10G405-A138			
Approved By:	JACKY DENG	Description: MCX PLUG R/A FOR RG405			
Checked By:	SAMSON XIA	Material:	See BOM	Treatment:	See BOM
Drawn By:	MARK YANG	Unit:	mm	Size:	A4
		Scale:	5:1	Sheet: 1 of 1	

SHINTO SHINTO ELECTRONICS CO.,LTD
<http://www.shinto-electronics.com>

