

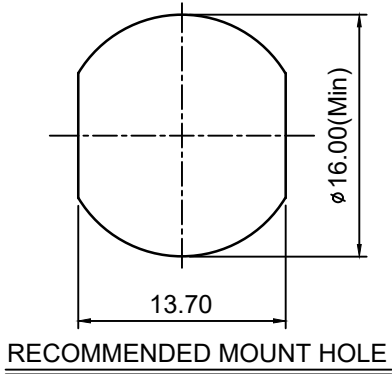
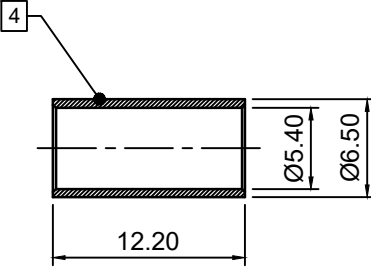


Customer code:	CS0102	Part number:	NFS21L195-A225	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS: 1.1 FREQUENCY RANGE:DC~6GHz 1.2 IMPEDANCE:50Ω 1.3 VSWR:1.5 MAX. 1.4 INSULATION RESISTANCE: 5000MΩ 2. MECHANICAL CHARACTERISTICS: 2.1 TEMPERATURE RANGE: -55°C~+155°C 2.2 DURABILITY: 500 CYCLES MIN. 3. SALT SPRAY REQUIREMENTS: 600H 4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	Jo.Yuan	2024-07-23

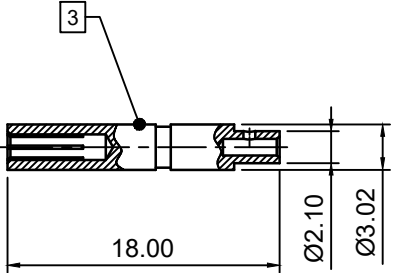

RECOMMENDED MOUNT HOLE

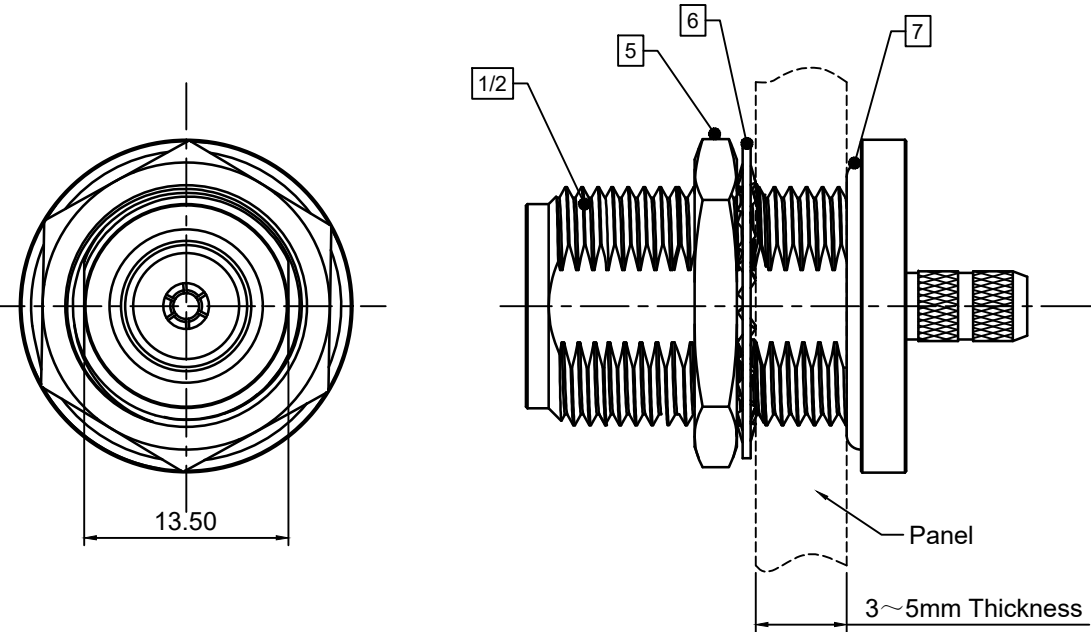

⑤	O-RING	SILICONE RUBBER	NATURE	1 EA
⑤	WASHER	PHOSPHOR COPPER	Sn-Ni ALLOY	1 EA
⑤	NUT	BRASS	Sn-Ni ALLOY	1 EA
④	FERRULE	BRASS	Sn-Ni ALLOY	1 EA
③	CONTACT PIN	PHOSPHOR COPPER	GOLD	1 EA
②	BODY	BRASS	Sn-Ni ALLOY	1 EA
①	INSULATOR	TEFLON	NATURE	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.10
THREE PLACE DECIMAL .XXX	±0.02
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	Jo.Yuan

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: NFS21L195-A225		Description: N BHD JACK FOR LMR195 CABLE	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 2:1	Sheet: 1 of 1

