



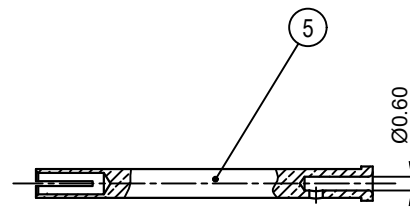


Customer code:		Part number:	QAFS13G316-A87	Rev:	A	Changing log				
Note: 1. Electrical characteristics: 1.1 Impedance: 50Ω						Rev.	ECN#	Description	Changed by	Date
						A	None	First release.	Samson.Xia	2014-08-01

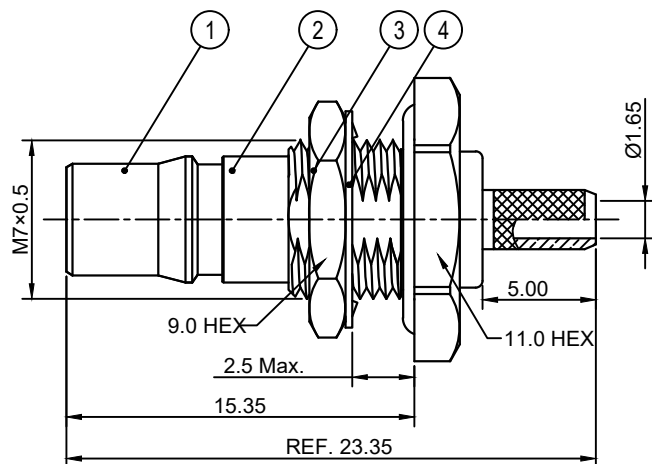

RECOMMENDED CABLE
STRIPPING DIM'S

⑥	FERRULE	BRASS	NICKEL	1 EA
⑤	CONTACT	BERYLLIUM COPPER	GOLD	1 EA
④	WASHER	PHOSPHOR BRONZE	TERNARY ALLOY	1 EA
③	NUT	BRASS	TERNARY ALLOY	1 EA
②	BODY	BRASS	TERNARY ALLOY	1 EA
①	INSULATOR	PTFE	NATURAL	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

RECOMMENDED PATTERN HOLE

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.5
TWO PLACE DECIMAL	.XX	±0.2
THREE PLACE DECIMAL	.XXX	±0.1
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±2°

Signature	
Approved By:	Jackey.Deng
Checked By:	Mark.Yang
Drawn By:	Samson.Xia

 SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com	
Shinto P/N:	QAFS13G316-A87
Description:	QMA JACK S/T FOR RG316/RG174
Material:	SEE BOM
Treatment:	SEE BOM
Unit:	mm
Size:	A4
Scale:	3:1
Sheet:	1 of 1

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO SHINTO.ANY USE OR DISCLOSURE OF THIS INFORMATION,EXCEPT FOR THE EXCLUSIVE BENEFIT OF SHINTO IS PROHIBITED.

