

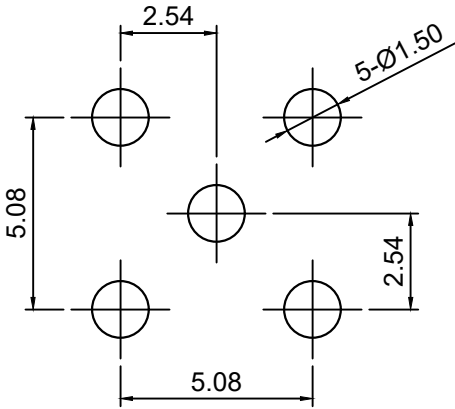


Customer code:	N/A	Part number:	SMR10G316-A80	Rev:	A	Changing log			
Rev.	ECN#	Description			Changed by	Date			
A	None	First release.			M.YANG	2024-04-08			

- NOTE:
1. ELECTRICAL CHARACTERISTICS:
- 1.1 FREQUENCY RANGE:DC~6GHz
- 1.2 VSWR:1.5 MAX.
- 1.3 IMPEDANCE:50Ω
- 1.4 INSULATION RESISTANCE: 5000MΩ MIN.
- 1.5 CONTACT RESISTANCE
- 1.5.1 CENTER CONTACT: 3 MΩ
- 1.5.2 OUTER CONTACT: 2.5 MΩ
2. MECHANICAL CHARACTERISTICS:
- 2.1 TEMPERATURE RANGE: -25°C~+75°C
- 2.2 MATING CYCLES:500 CYCLES MIN.
- 2.3 LATCH RETENTION FORCE: 300N MIN.
3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

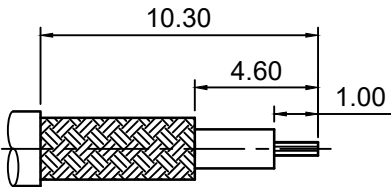

推荐安装孔位

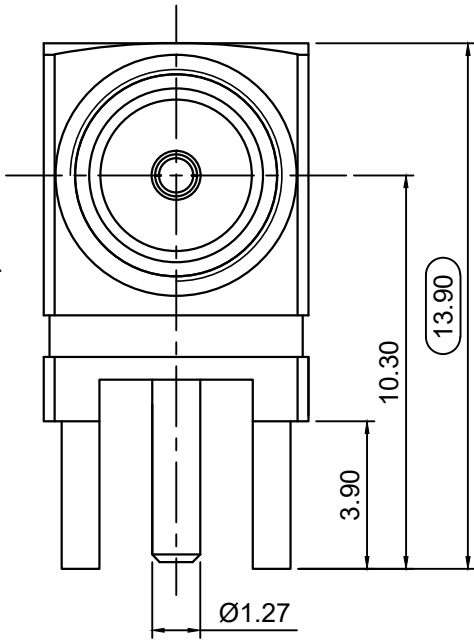

RECOMMENDED CABLE
STRIPPING DIM'S


TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.25
TWO PLACE DECIMAL .XX	±0.1
THREE PLACE DECIMAL .XXX	±0.05
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature

Approved By:

Checked By:

Drawn By:

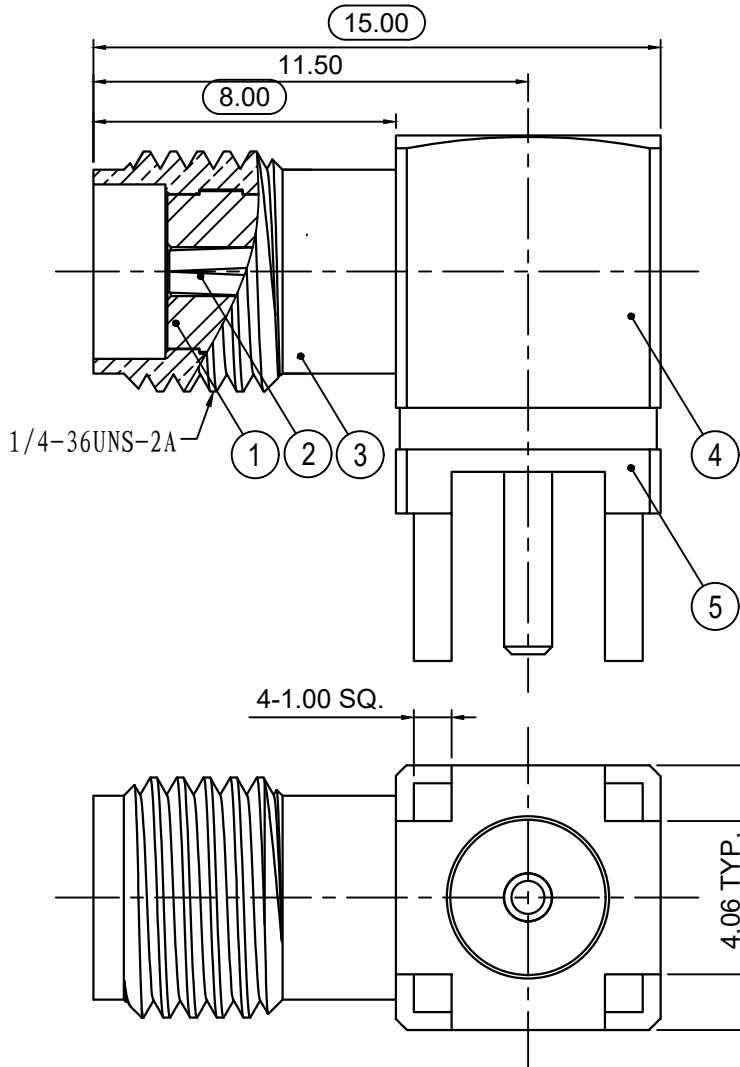

SHINTO ELECTRONICS CO.,LTD
<http://www.shinto-electronics.com>

Shinto P/N: SFR100000-A115	
Description: SMA JACK R/A FOR PCB	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 5:1	Sheet: 1 of 1