

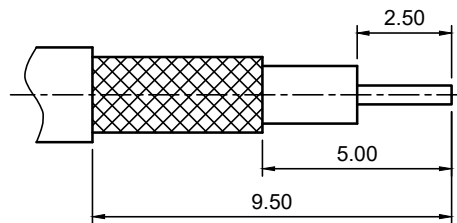
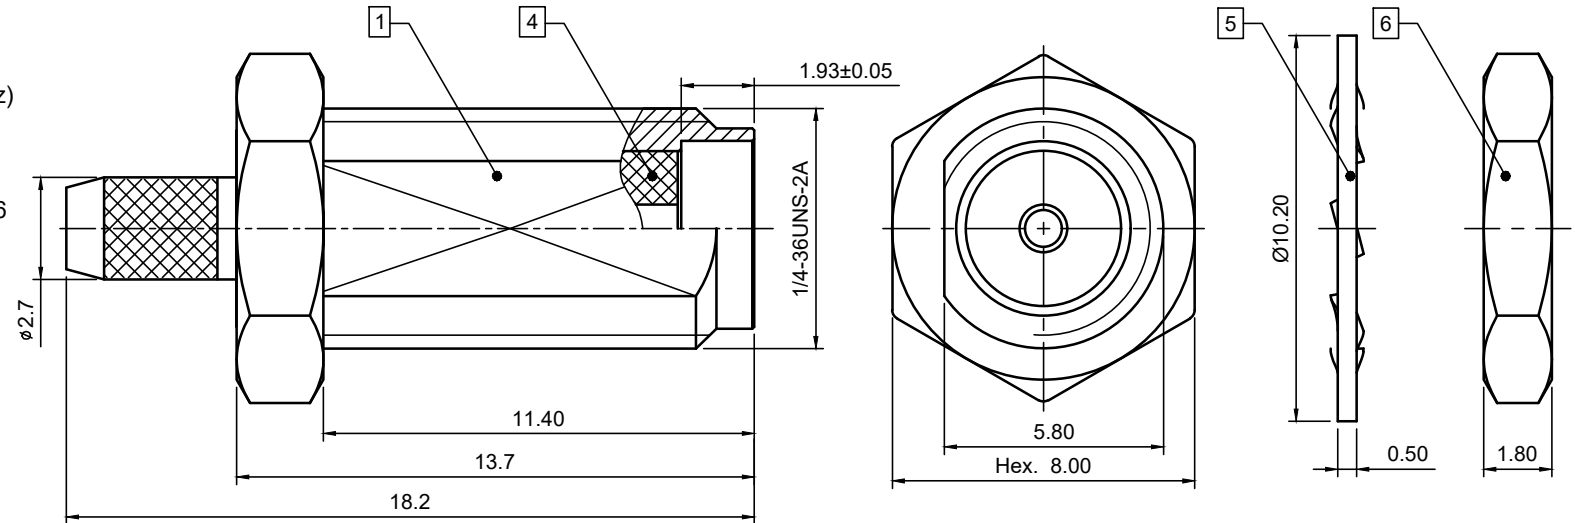
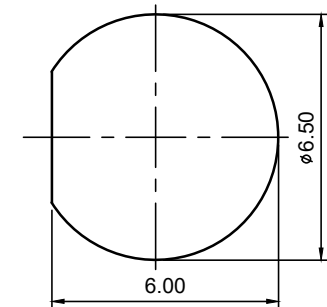


Customer code:	None	Part number:	SFS10G316-A26	Rev:	A	Changing log				
Note: 1. Electrical characteristics:						Rev.	ECN#	Description	Changed by	Date
						A	None	First release.	M.YANG	2017-06-25

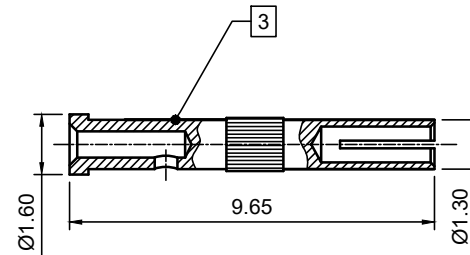

RECOMMENDED STRIP DIMENSION

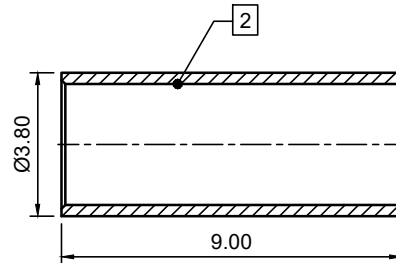

RECOMMENDED MOUNT HOLE

⑥	HEX. NUT	BRASS	GOLD	1 EA
⑤	WASHER	PHOSPHOR COPPER	GOLD	1 EA
④	INSULATOR	TEFLON	NONE	1 EA
③	FERRULE	BRASS	NICKEL	1 EA
②	CONTACT PIN	BERYLLIUM COPPER	GOLD	1 EA
①	BODY	BRASS	GOLD	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED			
ONE PLACE DECIMAL	.X	±0.20	
TWO PLACE DECIMAL	.XX	±0.10	
THREE PLACE DECIMAL	.XXX	±0.02	
HOLE DIA. VARIATION	.XX	N/A	
ANGULAR DIMENSION		±3°	

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

 SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: SFS10G316-A26		Description: SMA JACK S/T FOR RG316 CABLE	
Material: See BOM	Treatment: See BOM		
Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1

