



NOTE:
1 ELECTRICAL CHARACTERISTICS:
1.1 IMPEDANCE:NON-CONSTANT
1.2 VOLTAGE RATING: 3500 VRMS
5000 VDC.
2 MECHANICAL CHARACTERISTICS:
2.1 TEMPERATURE RANGE: -55°C~~+155°C
2.2 DURABILITY: 500 CYCLES.
3 ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2022-03-11

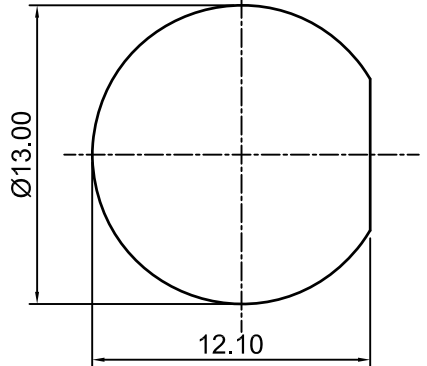

RECOMMENDED MOUNT HOLE

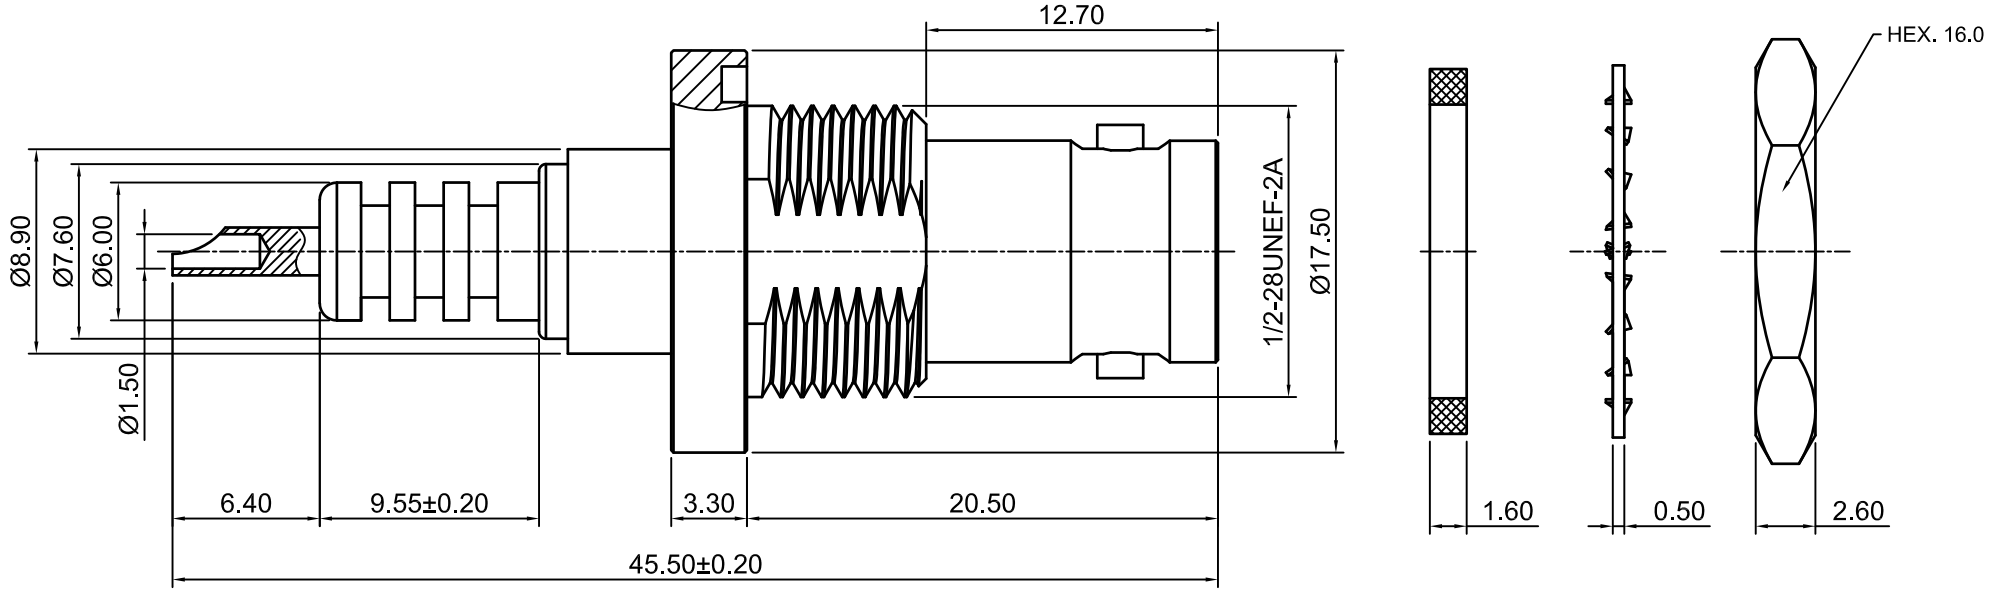

⑥	HEX. NUT	BRASS	NICKEL	1 EA
⑤	WASHER	PHOSPHOR COPPER	NICKEL	1 EA
④	GASKET	SILICONE RUBBER	NATURE	1 EA
③	INSULATOR	TEFLON	NATURE	1 EA
②	CONTACT PIN	PHOSPHOR COPPER	GOLD	1 EA
①	BODY	BRASS	NICKEL	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.02
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: SHV-BJ-1		Description: SHV RECEPTACLE B/H REAR MOUNT	
Material: See BOM	Treatment: See BOM		
Unit: mm	Size: A4	Scale: 3:1	Sheet: 1 of 1