
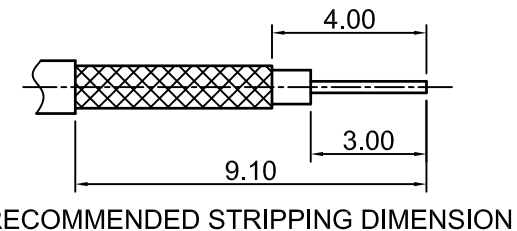
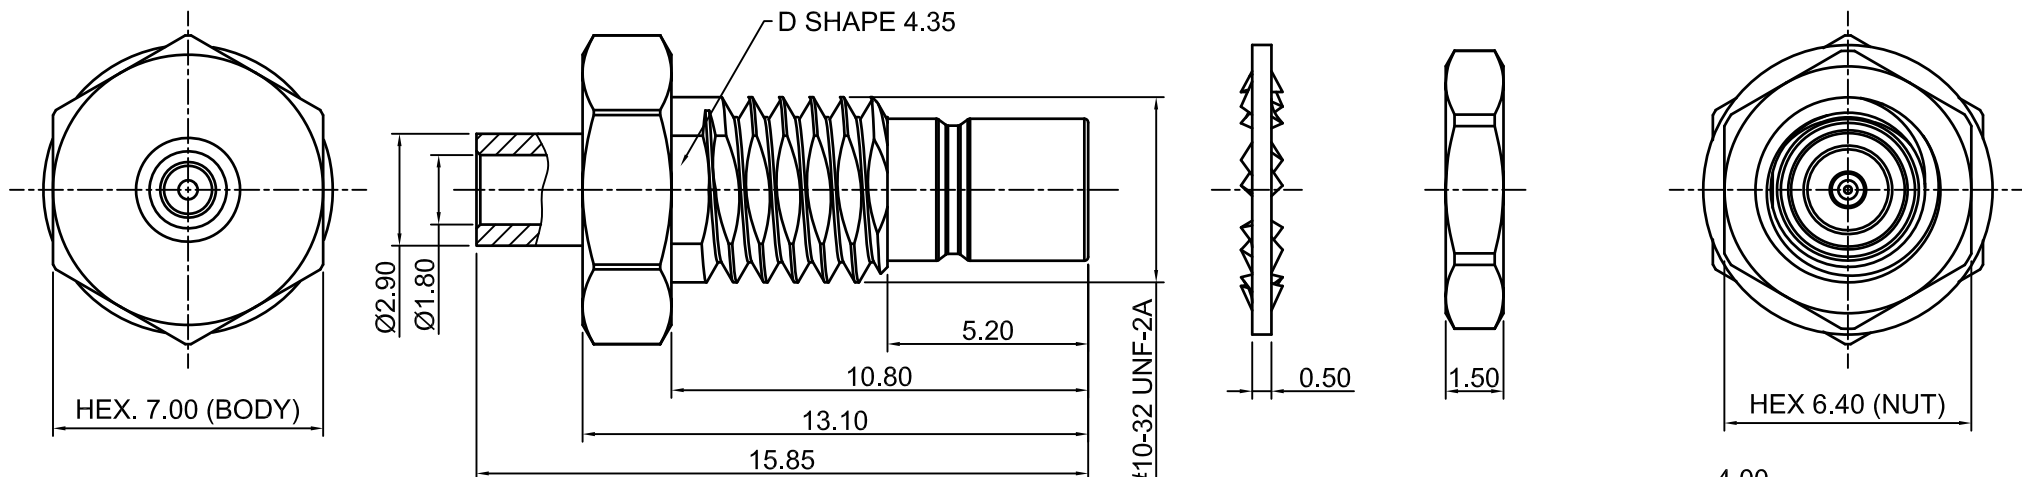


Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2024-12-02

NOTE:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 FREQUENCY RANGE:DC~4GHz
 - 1.2 IMPEDANCE:50Ω
 - 1.3 RETURN LOSS: -15 dB
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS. MIN.
 - 1.5 INSULATION RESISTANCE: 500MΩ
2. MECHANICAL CHARACTERISTICS:
 - 2.1 TEMPERATURE RANGE: -55°C~+155°C
 - 2.2 DURABILITY: 500 CYCLES MIN.
3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

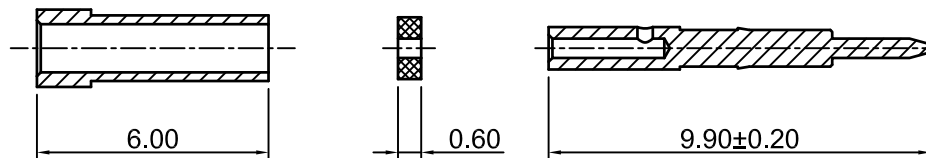

⑦	HEX. NUT	BRASS	GOLD	1EA
⑥	WASHER	PHOSPHOR COPPER	GOLD	1EA
⑤	FERRULE	BRASS	NICKEL	1EA
④	INSULATOR-2	TEFLON	NATURAL	1EA
③	CONTACT PIN	BRASS	GOLD	1EA
②	INSULATOR	TEFLON	NATURAL	1EA
①	BODY	BRASS	GOLD	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.10
THREE PLACE DECIMAL .XXX	±0.02
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO SHINTO ELECTRONICS CO.,LTD
http://www.shinto-electronics.com

Shinto P/N: SMB-BP-137	
Description: SMB PLUG S/T FOR RF1.37 GOLD PLATED	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 5:1	Sheet: 1 of 1