



Customer code:	NONE	Part number:	SMB-P-086	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS						Rev.	ECN#	Description	Changed by	Date
						A	NONE	FIRST RELEASE.	M.YANG	2023-03-03

- NOTE:
- ELECTRICAL CHARACTERISTICS:
 - FREQUENCY RANGE:DC~6GHz
 - IMPEDANCE:50Ω
 - VSWR: 1.3 @ 3GHz
1.5 @ 6GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS. MIN.
 - INSULATION RESISTANCE: 1000MΩ
 - MECHANICAL CHARACTERISTICS:
 - MECHANICAL INTERFACE: MIL-STD-34B (SMB PIN CONTACT)
 - TEMPERATURE RANGE: -65°C~+165°C
 - DURABILITY: 500 CYCLES MIN.
 - ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

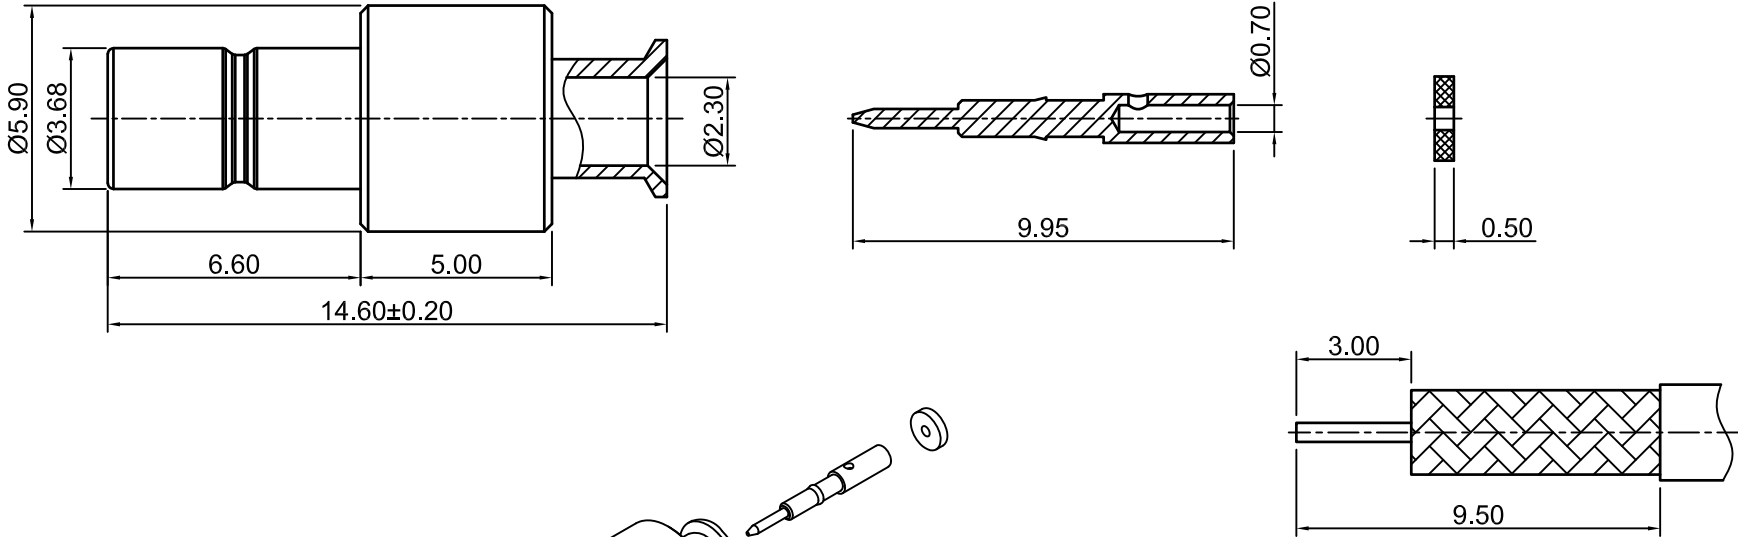

RECOMMENDED CABLE STRIPPING DIMENSION

④	INSULATOR	TEFLON	NATURAL	1EA
③	CONTACT PIN	BRASS	NICKEL	1EA
②	INSULATOR	TEFLON	NATURAL	1EA
①	BODY	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

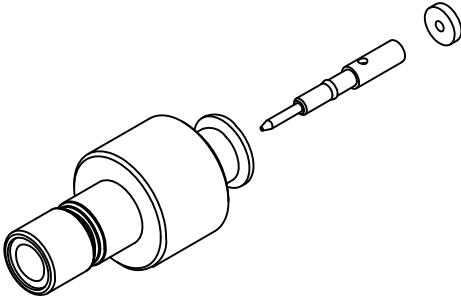

TOLERANCES UNLESS OTHERWISE SPECIFIED		Signature		Shinto P/N: SMB-P-086			
		Approved By:		Description: SMB PLUG S/T FOR 086" COAX CABLE			
		Checked By:		Material: See BOM		Treatment: See BOM	
		Drawn By:	M.YANG	Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1
ONE PLACE DECIMAL	.X	±0.20					
TWO PLACE DECIMAL	.XX	±0.10					
THREE PLACE DECIMAL	.XXX	±0.02					
HOLE DIA. VARIATION	.XX	N/A					
ANGULAR DIMENSION		±3°					