
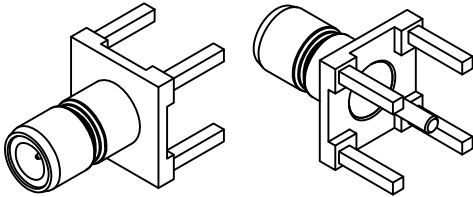


Customer code:	NONE	Part number:	SMB-R-11.43	Rev:	A	Changing log			
----------------	------	--------------	-------------	------	---	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2024-04-28

- NOTE:
- 1. ELECTRICAL CHARACTERISTICS:
 - 1.1 FREQUENCY RANGE:DC~4GHz
 - 1.2 IMPEDANCE:50Ω
 - 1.3 VSWR: 1.2
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS. MIN.
 - 1.5 INSULATION RESISTANCE: 1000MΩ
 - 2. MECHANICAL CHARACTERISTICS:
 - 2.1 TEMPERATURE RANGE: -65°C~+165°C
 - 2.2 DURABILITY: 500 CYCLES MIN.
 - 3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

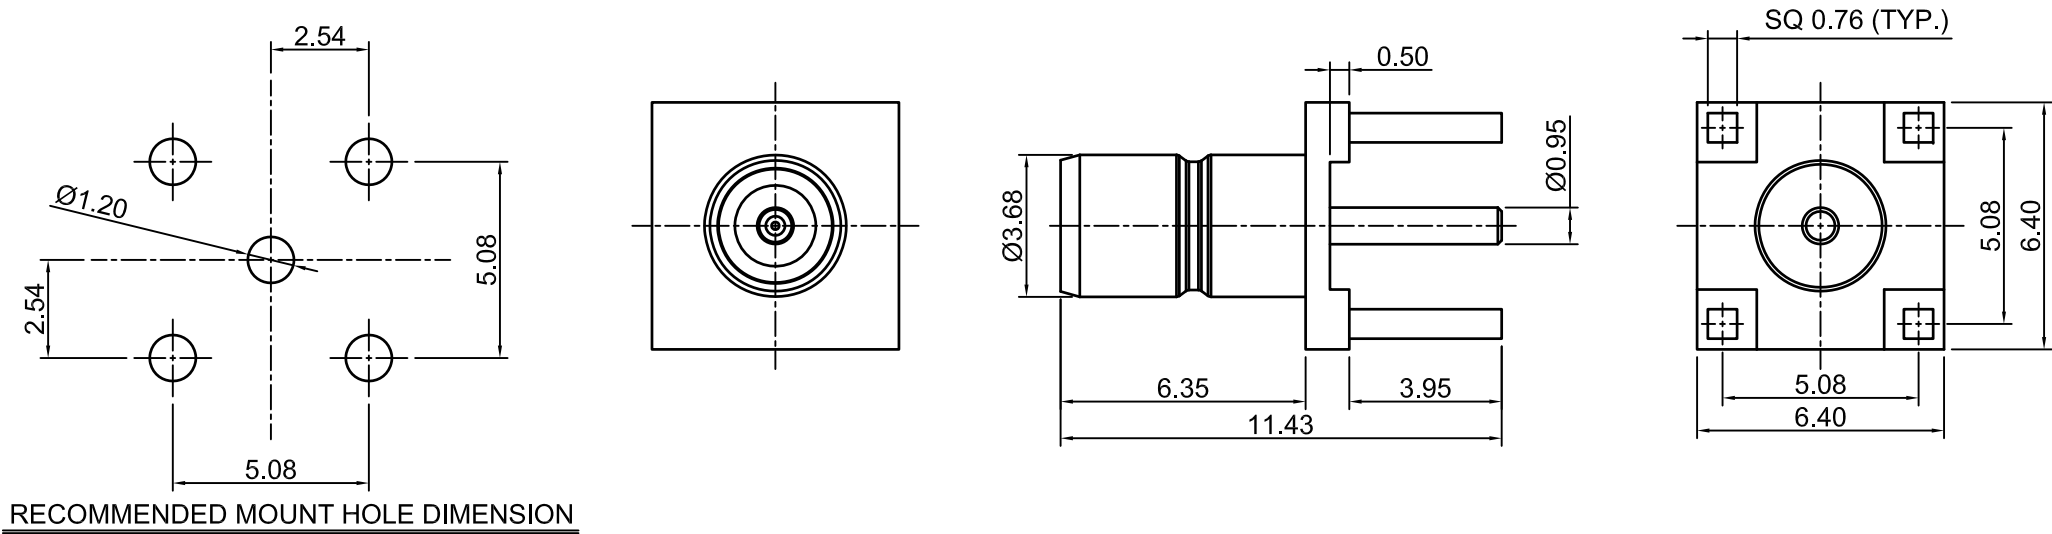

③	CONTACT PIN	BRASS	GOLD	1EA
②	INSULATOR	TEFLON	NATURAL	1EA
①	BODY	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X		±0.20
TWO PLACE DECIMAL .XX		±0.10
THREE PLACE DECIMAL .XXX		±0.02
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: SMB-R-11.43		Description: SMB PLUG FOR PCB DIP MOUNT	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1