
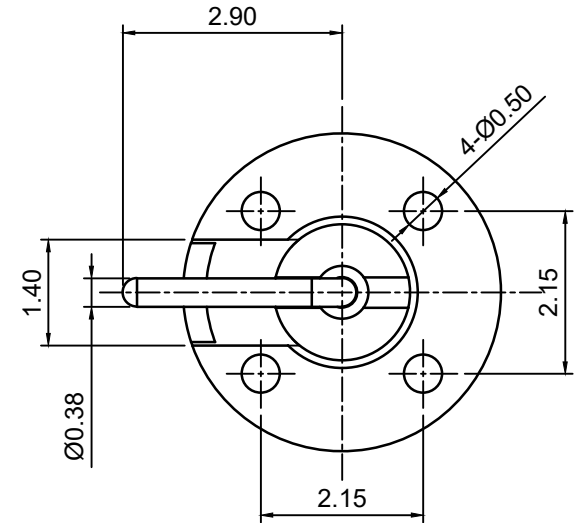
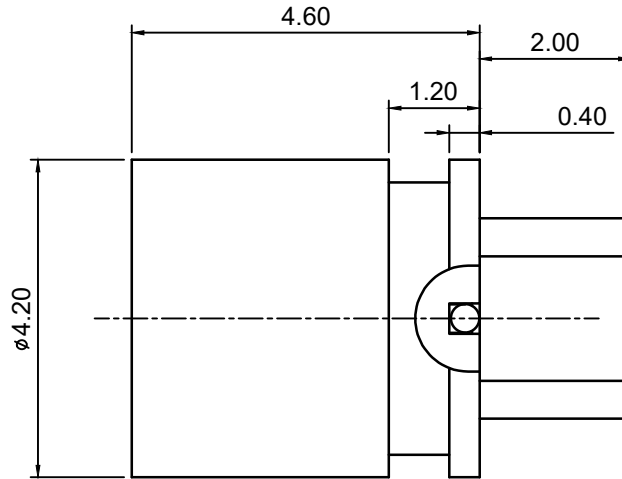


Customer code:	None	Part number:	SPMS100000-A430	Rev:	A	Changing log				
NOTE: 1. ELECTRICAL CHARACTERISTICS: 1.1 IMPEDANCE:50Ω 1.2 FREQUENCY RANGE:DC~18GHz 1.3 VSWR:1.3 MAX. 1.4 CONTACT RESISTANCE 1.4.1 CENTER CONTACT: ≤6.0 MΩ 1.4.2 OUTER CONTACT: ≤2.0 MΩ 1.5 INSULATION RESISTANCE: ≥1000MΩ 2. MECHANICAL CHARACTERISTICS: 2.1 MATING CYCLES:500 CYCLES MIN. 2.2 TEMPERATURE RANGE: -65°C~+165°C 3. ALL MATERIALS AND PROCESS ARE ROHS COMPLIANT.						Rev.	ECN#	Description	Changed by	Date
						A	None	First release.	Jo	2025-02-26

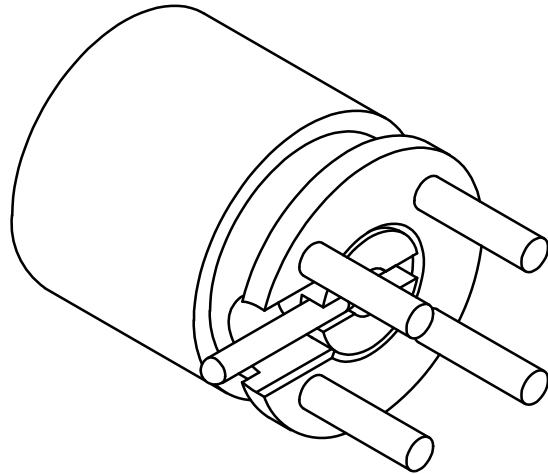

③	CONTACT PIN	PHOSPHOR COPPER	GOLD	1EA
②	INSULATOR	PTFE	NATURE	1EA
①	BODY	BRASS	GOLD	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.2
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.05
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	

 SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N: SPMS100000-A430		Description: SMP-JWHD503-SB	
Material: See BOM	Treatment: See BOM		
Unit: mm	Size: A4	Scale: 10:1	Sheet: 1 of 1

