

NOTE:

1. ELECTRICAL CHARACTERISTICS:





1.1 IMPEDANCE: 50Ω

1.2 FREQUENCY RANGE: 0~1 GHz

1.3 VSWR: 1.5 MAX.

2. ALL MATERIALS AND PROCESS ARE ROHS COMPLIANT.

Rev.	ECN#	Description	Changed by	Date
A	None	FIRST RELEASE.	M.YANG	2021-06-23

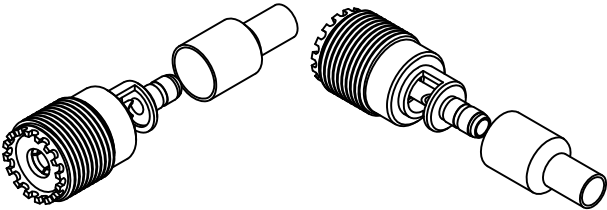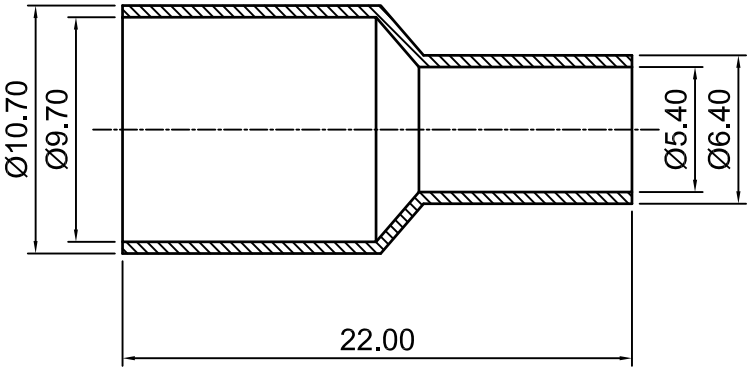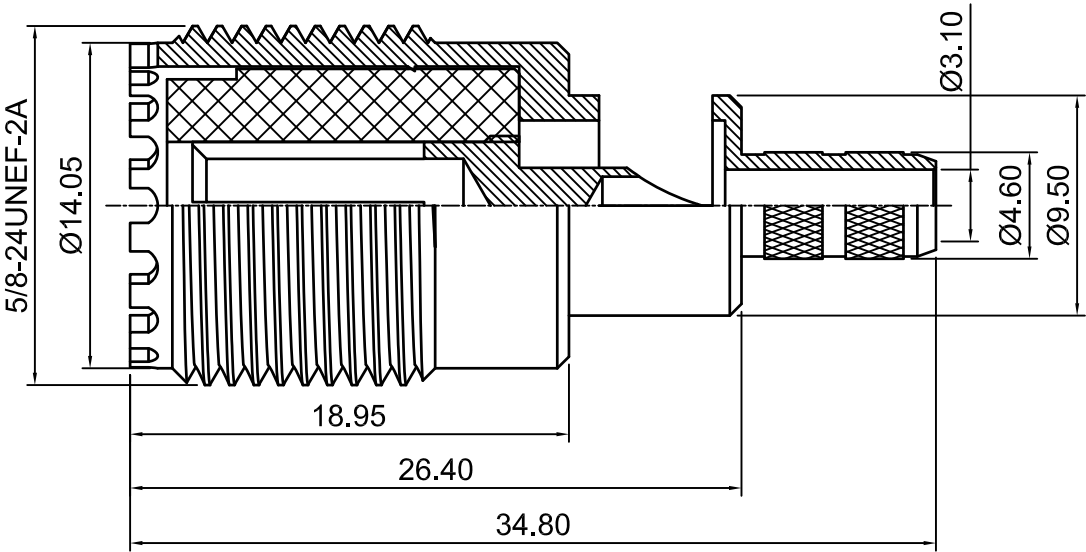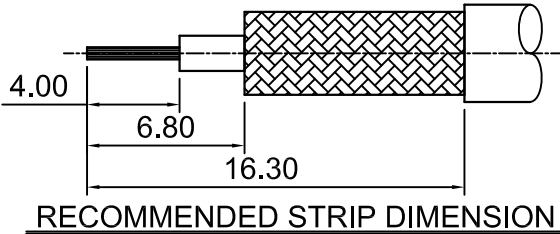

④	FERRULE	BRASS	NICKEL	1 EA
③	INSULATOR	POM	NATURE(WHITE)	1 EA
②	CONTACT PIN	PHOSPHOR COPPER	GOLD	1 EA
①	BODY	BRASS	NICKEL	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.02
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com			
Shinto P/N:		UFS11G058-A431	
Description:		UHF JACK STRAIGHT FOR RG58 CABLE	
Material:	See BOM	Treatment:	See BOM
Unit:	mm	Size:	A4
Scale:	3:1	Sheet:	1 of 1